


DT8 LED-Dimmer 4-kanalig für Konstantspannung bis 120 W / Kanal

DT8 LED dimmer 4 channel for constant voltage up to 120 W / channel

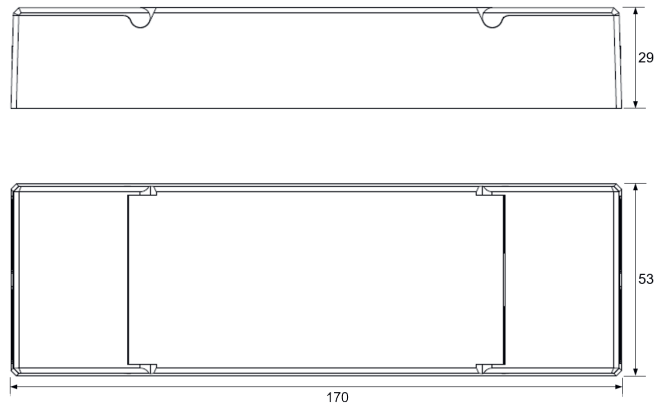

max. 480 W

Artikelnummer	Part no.	808660
Typ	Type	DU4DA8-14-480
Eingangsspannung	Input voltage	12..24 Vdc
Ausgangsspannung	Output voltage	12..24 Vdc
Max. Ausgangsleistung bei 12 Vdc	Max. output power at 12 Vdc	4 x 60 W
Max. Ausgangsleistung bei 24 Vdc	Max. output power at 24 Vdc	4 x 120 W
PWM-Frequenz	PWM frequency	1500 Hz
Steuerstrom max.	Control current max.	2 mA
Umgebungstemperatur (ta)	Ambient temperature (ta)	-20..+50 °C
Max. Bemessungstemperatur (tc)	Rated max. temperature (tc)	75 °C
Abmessungen	Dimensions	170 x 53 x 29 mm

- 4-kanaliger DALI² DT8 LED-Dimmer für LEDs für konstante Spannung
- Ansteuerung nur durch DALI mit SELV-Potential
- DALI Start-Adresse wählen (4 aufeinanderfolgende Adressen):
 - rechten Knopf (0..9) lange drücken bis Anzeige blinkt (Adresse des ersten Kanals)
 - rechts / links drücken zum Einstellen
 - lange rechts drücken zum Speichern
 - oder Adressierung durch DALI-Steuerung
- Arbeitsmodus einstellen:
 - Beide Knöpfe lange drücken bis Display blinkt, einen Knopf drücken, um den Arbeitsmodus zu wählen
 - nn: für einfarbige LED-Bänder, alle Kanäle gleich
 - R9: für RGBW LED-Bänder
 - 7c: für Tunable White LED-Bänder
 - H4: für Einstellungen über XY-Koordinate
 - Beide Knöpfe lange drücken um Auswahl zu bestätigen
- Geeignet zur Ansteuerung durch CASAMBI-Schnittstellen im DT8-Modus

- 4-channel DALI² DT8 dimmer for constant voltage LEDs
- Control only by DALI with SELV potential
- Select DALI start address (4 consecutive addresses):
 - press long the right button (0..9) until the display flashes (address of the first channel)
 - press right / left to adjust
 - press long right to save
 - or address by DALI control
- Set working mode:
 - press both buttons long until display flashes, press one button to select working mode
 - nn: for single color LED strips, all channels the same
 - R9: for RGBW LED strips
 - 7c: for tunable white LED strips
 - H4: for settings via XY coordinate
 - press long both buttons to confirm selection
- Suitable for control by CASAMBI interfaces in DT8 mode


Multi-addresses PRO DALI DT8 LED Controller

70040048-ZW



Important: Read All Instructions Prior to Installation

Function introduction

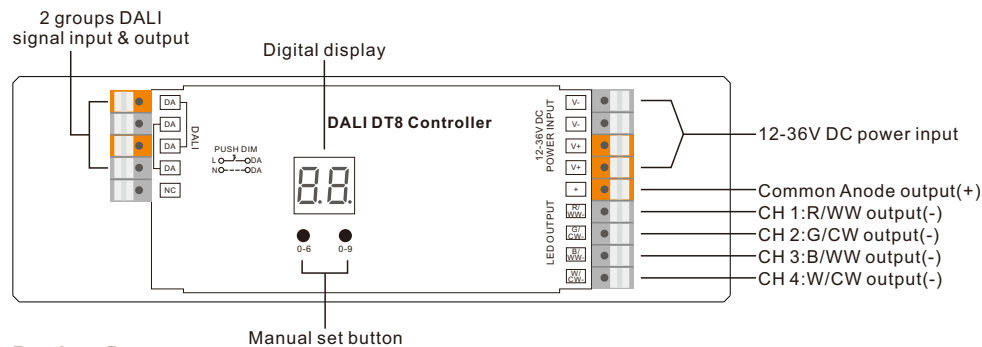

Product Data

No.	Input Voltage	Output Current	Output Power	Remarks	Size(LxWxH)	DALI Consumption	Dimming Range	Ambient Temperature
1	12-36VDC	4x5A	4x(60-180)W	Constant voltage	170x53.4x28mm	2mA	0.1%-100%	-20°C ~ +50°C
2	12-36VDC	4x350mA	4x(4.2-12.6)W	Constant current	170x53.4x28mm	2mA	0.1%-100%	-20°C ~ +50°C
3	12-36VDC	4x700mA	4x(8.4-25.2)W	Constant current	170x53.4x28mm	2mA	0.1%-100%	-20°C ~ +50°C

- In compliance with IEC 62386-101:2014, IEC 62386-102:2014, IEC 62386-207 Ed2, IEC 62386-209:2011
- Built-in DALI-2 interface, DALI DT8 device
- Multi-addresses enabled DT8 control gear
- Multi-devices integrated in one control gear
- Multi-functional, 6 in 1: Tc, RGBWAF, XY, 2*Tc, XY+W (DT6), DT6
- DALI address manually assignable through manual set buttons and showed on the display
- Can be set as different device types: single-address types or multi-addresses types
- Single-address device types: Tc, RGBWAF, XY, DT6
- Multi-addresses device types: 2*Tc, XY+W (DT6)
- 4 Channels constant voltage output
- Control of four PWM outputs via DALI device type 8
- Color control as defined in the DALI specification device type 8
- Supports DT8 device commands, compatible with universal DALI masters that support DT8 commands
- Configuration via DALI master USB interface
- Color temperature and RGB color control through push dim mode even if without DALI
- Waterproof grade: Ip20

Safety & Warnings

- DO NOT install with power applied to device.
- DO NOT expose the device to moisture.

Operation

1. Select a DALI Device Type



- 1.1. Press and hold down both buttons until digital display flashes, then release the button.
- 1.2. Keep clicking the 2nd button, you will get the 8 device types one by one as follows, 6 of them are valid modes, please ignore the other 2 modes which are invalid here:

Tc, means 2 Tc color type devices integrated in one control gear, which can control 2 groups of tunable white LED separately using 2 DALI addresses under this mode.

XY (invalid mode since this mode requires 5 PWM channels), means XY & Tc color type devices integrated in one control gear, which can control RGB & CCT LED separately using 2 DALI addresses under this mode.

RGBWAF (invalid mode since this mode requires 5 PWM channels), means RGBWAF & Tc color type devices integrated in one control gear, which can control RGB & CCT LED separately using 2 DALI addresses under this mode.

XY, means XY & DT6 type devices integrated in one control gear, which can control RGB & W LED separately using 2 DALI addresses under this mode.

XY, means XY coordinate color type, which can control RGB LED using 1 DALI address under this mode.

Tc, means Tc color type, which can control tunable white LED using 1 DALI address under this mode.

RGBWAF, means RGBWAF color type, the device can control RGBW LED using 1 DALI address under this mode.

DT6, means DT6 device type, which can control single color LED using 1 DALI address under this mode.

- 1.3. Select a device type you would like and then press and hold down both buttons until digital display stops flashing to confirm the selection.



2. Setting DALI address

- 2.1. Press and hold down the first button on the left until digital display flashes, then release the button.
- 2.2. Click any of the two buttons once to select a digit, click again to change the digit until the desired DALI address appears. Click first button to set "tens" position and second button to set "units" position. The address can be set from 00~63.
- 2.3. Then press and hold down any of the 2 buttons until the numeric digital display stops flashing to confirm the setting.

Note: DALI address can be manually assigned from 00-63-FF, by factory defaults, no DALI address is assigned for the dimmer, and the display shows **FF**. Setting DALI address as **FF** will reset the dimmer to factory defaults.

Once an address is selected, depending on the device type selected, the control gear may occupies 2 consecutive addresses or 1 address. For example, if the control gear is addressed to 22 on the display, when the device type is multi-addresses type, the control gear occupies address 22 & 23, when the device type is single-address type, the control gear occupies address 22.



3. Setting the Number of Output Channel

- 3.1 Under **RGBWAF** mode, press and hold down the second button until digital display flashes, then release the button.
- 3.2 Click the first button to switch between 3A and 4A. 3A means controlling three output channels RGB, 4A means controlling four output channels RGBW.
- 3.3 Then press and hold down the second button to confirm the setting.

4. DALI Address Assigned by DALI Masters

DALI address can also be assigned by DALI Master controller automatically, please refer to user manuals of compatible DALI Masters for specific operations.

Note: The digital display will show **AV** When the DALI master is assigning addresses. When the device type is multi-addresses type, the control gear will be discovered as 2 separate devices.

5. Push Dimmer Mode

While connected with an AC push switch, the digital display will show “PD” which means Push Dimmer Mode, operations under Push Dimmer Mode are as follows:

While **7c** device type is selected, only the 1st group tunable white LED will be controlled by the push switch,

- Click the button to switch ON/OFF
- Press and hold down the button to increase or decrease light intensity to desired level and release it, then repeat the operation to adjust light intensity to opposite direction. The dimming range is from 1% to 100%.
- Double click the button to switch between brightness mode and color temperature mode.
- Press and hold down the button to change color temperature under color temperature mode.

While **H6** device type is selected, only the RGB LED will be controlled by the push switch,

- Click the button to switch ON/OFF
- Press and hold down the button to increase or decrease light intensity to desired level and release it, then repeat the operation to adjust light intensity to opposite direction. The dimming range is from 1% to 100%.
- Double click the button to switch between brightness mode and RGB color mode.
- Press and hold down the button to change RGB colors under RGB color mode.

While **H4** or **r9** device type is selected, RGB LED will be controlled by the push switch,

- Click the button to switch ON/OFF
- Press and hold down the button to increase or decrease light intensity to desired level and release it, then repeat the operation to adjust light intensity to opposite direction. The dimming range is from 1% to 100%.
- Double click the button to switch between brightness mode and RGB color mode.
- Press and hold down the button to change RGB colors under RGB color mode.

While **7c** device type is selected, tunable white LED will be controlled by the push switch,

- Click the button to switch ON/OFF
- Press and hold down the button to increase or decrease light intensity to desired level and release it, then repeat the operation to adjust light intensity to opposite direction. The dimming range is from 1% to 100%.
- Double click the button to switch between brightness mode and color temperature mode.
- Press and hold down the button to change color temperature under color temperature mode.

While **76** device type is selected, single color LED will be controlled by the push switch,

- Click the button to switch ON/OFF
- Press and hold down the button to increase or decrease light intensity to desired level and release it, then repeat the operation to adjust light intensity to opposite direction. The dimming range is from 1% to 100%.

Memory function after power off or power failure enables the device to memorize the status before power off while power on again.

Wiring Diagram




Warning: Risk of poor contact, over temperature and burning out if connection wires are not tightened inside the spring terminals.


1. With DALI Master

1.1 When **7c** multi-addresses Tc device type selected

1.1.1 When total load of each receiver is over 10A

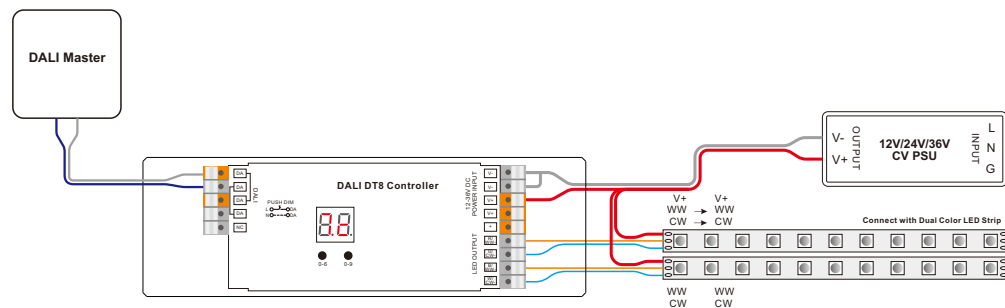


1.1.2 When total load of each receiver is not over 10A

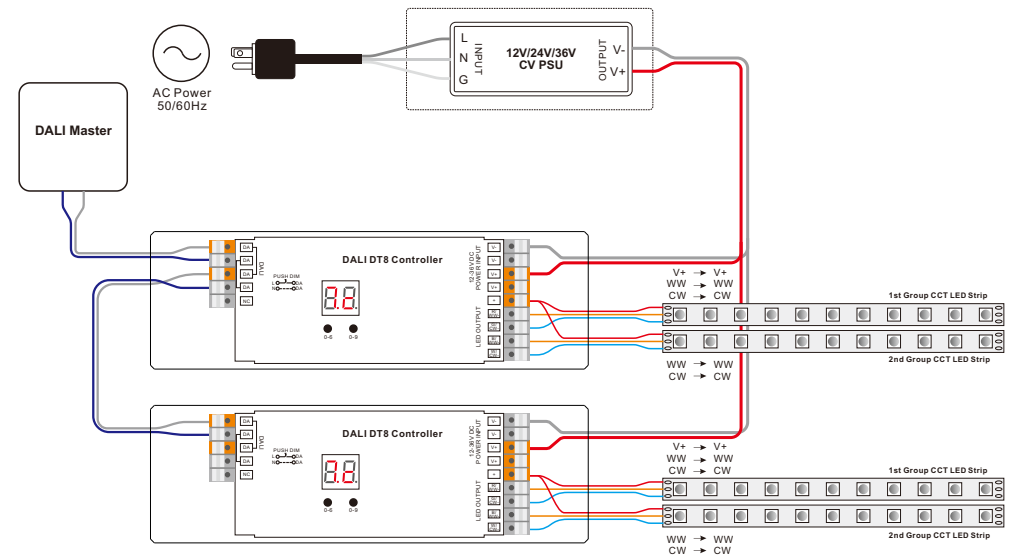


**Note: 1) Please make sure that the DALI master controller supports Tc color type commands.
2) The control gear will be discovered by master controller as 2 separate Tc devices.**

1.2 When **H6** multi-addresses XY+Single Color(DT6) device type selected

1.2.1 When total load of each receiver is not over 10A

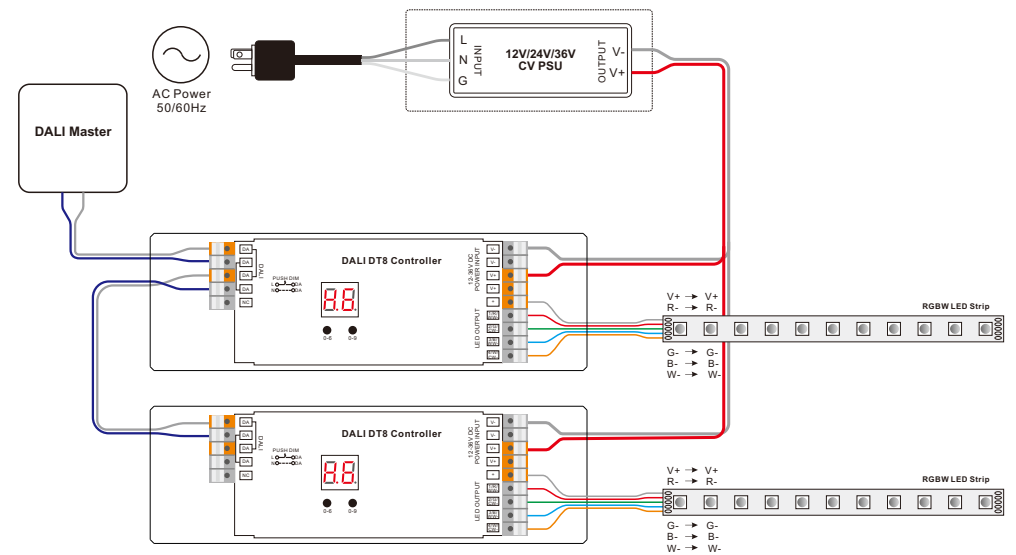


1.2.2 When total load of each receiver is over 10A

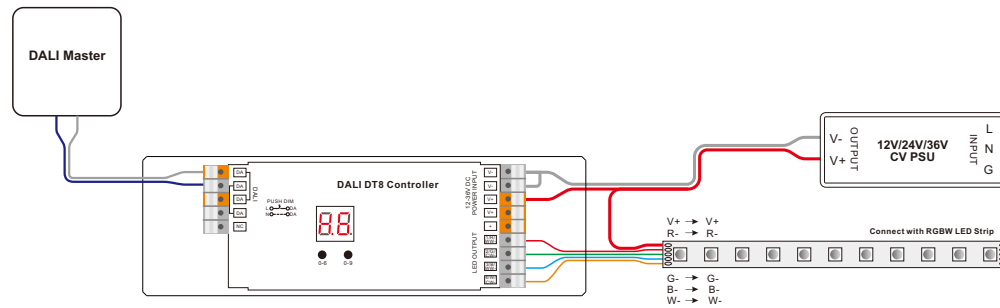


Note: 1) Please make sure that the DALI master controller supports XY & DT6 color type commands.
2) The control gear will be discovered by master controller as 2 separate devices: XY, DT6

1.3 When H4 single-address XY device type selected

1.3.1 When total load of each receiver is not over 10A

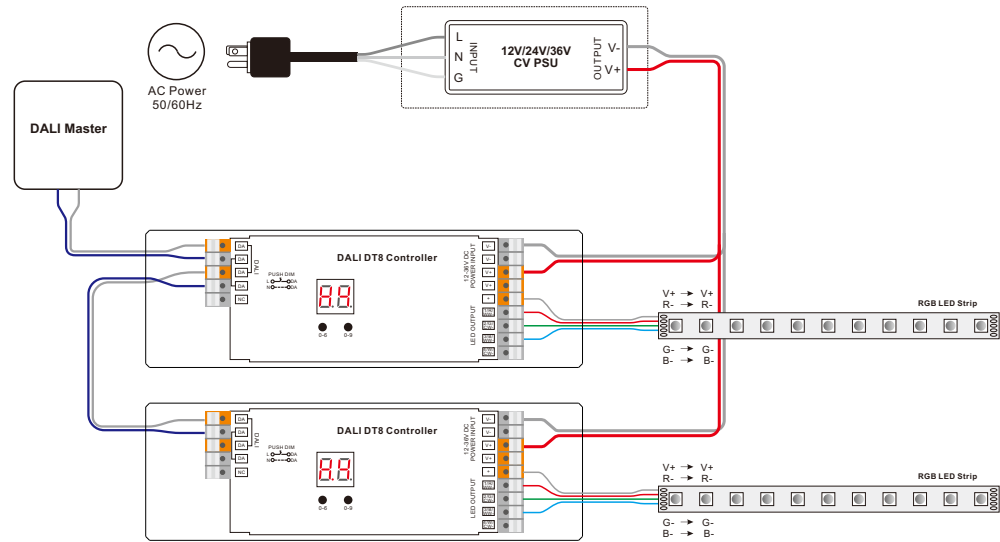


1.3.2 When total load of each receiver is over 10A

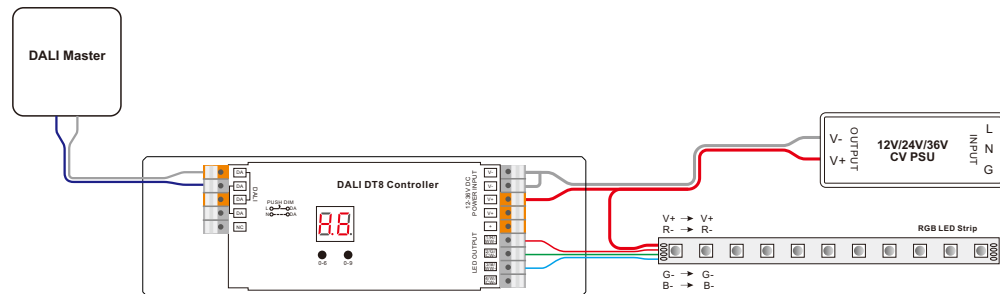


Note: Please make sure that the DALI master controller supports XY color type commands.

1.4 When Tc single-address Tc device type selected

1.4.1 When total load of each receiver is over 10A

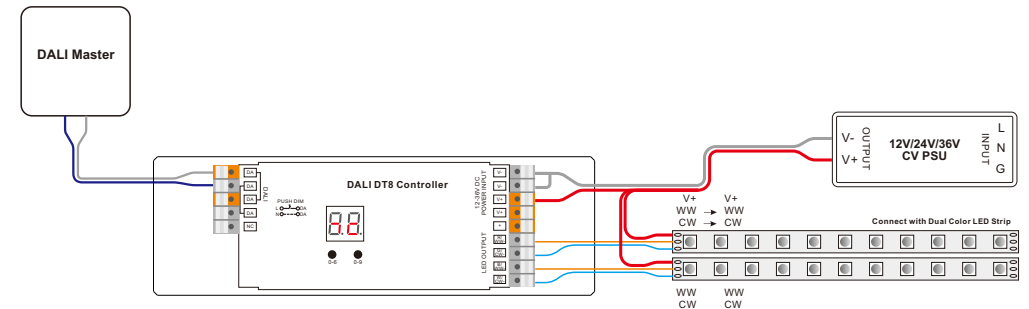


1.4.2 When total load of each receiver is not over 10A

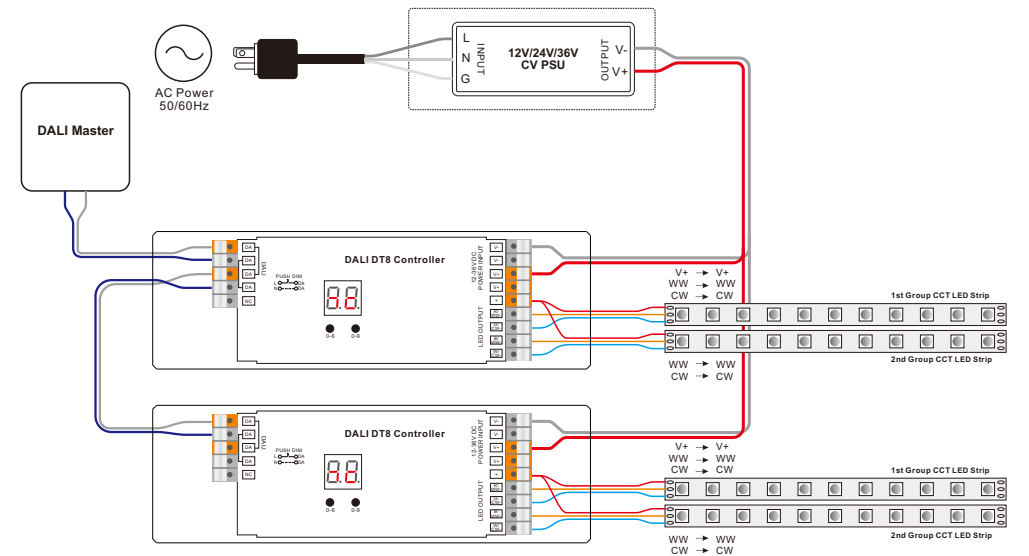


Note: 1) Please make sure that the DALI master controller supports Tc color type commands.
2) 2 groups CCT LED are controlled together.

1.5 When RGBWAF device type selected

1.5.1 When total load of each receiver is over 10A

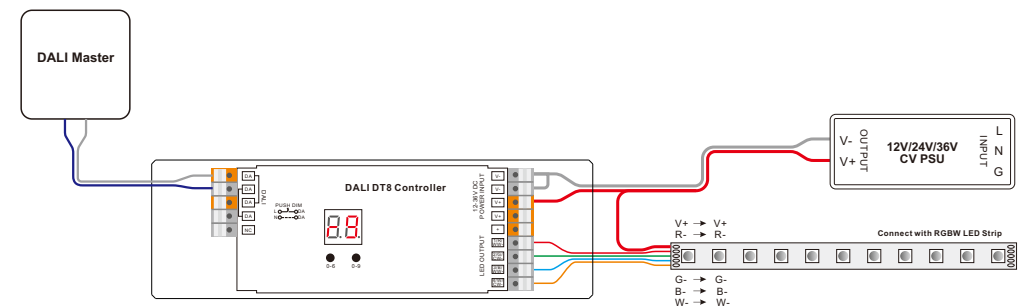


1.5.2 When total load of each receiver is not over 10A

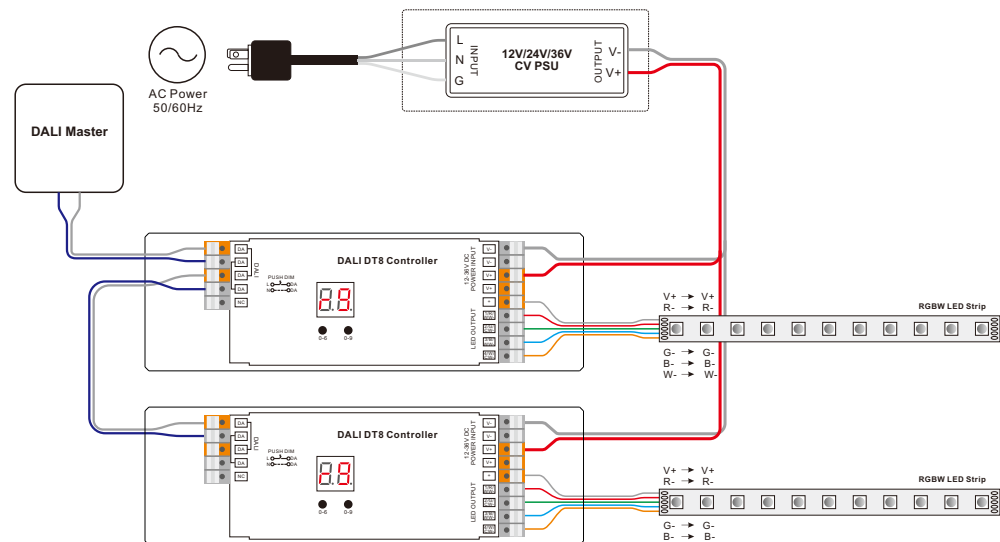


Note: Please make sure that the DALI master controller supports RGBWAF color type commands.

1.6 When 7c single-address DT6 device type selected

1.6.1 When total load of each receiver is not over 10A

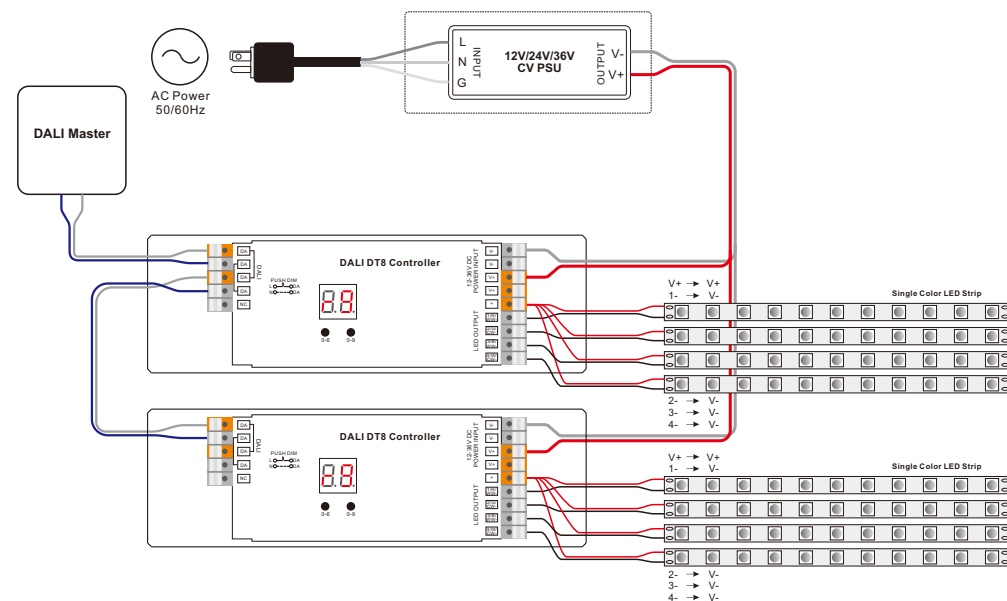

1.6.2 When total load of each receiver is over 10A

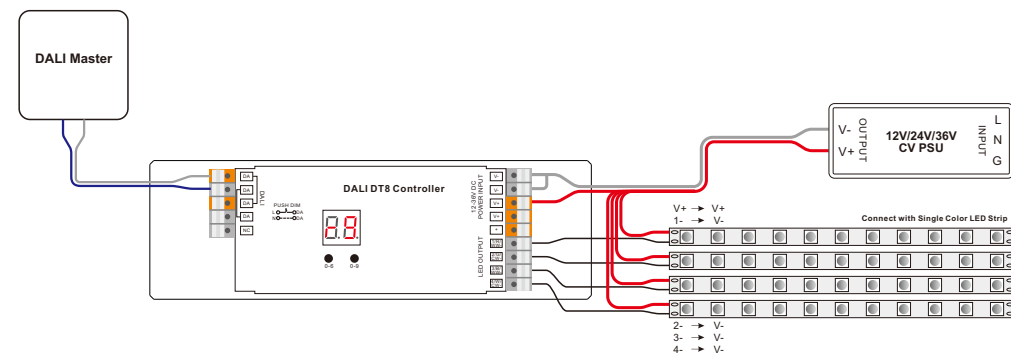


Note: The control gear will be discovered by DALI master as a DT6 device, 4 channels controlled together.


2. With Push Switch

2.1 When 7c multi-addresses Tc device type selected

2.1.1 When total load of each receiver is not over 10A

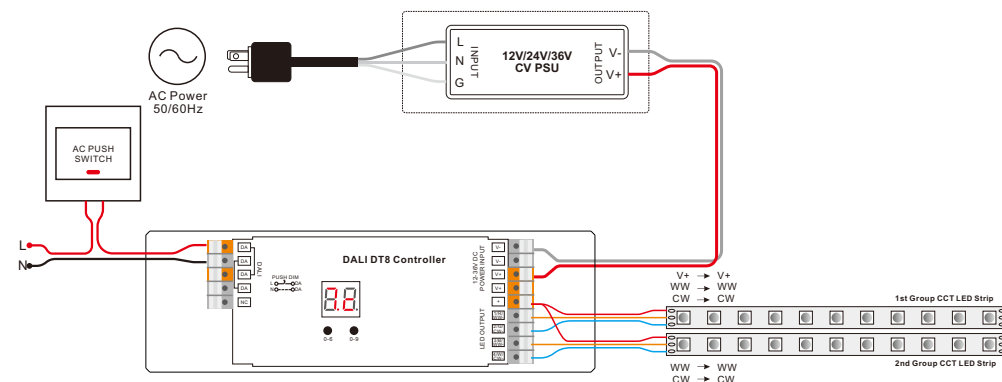


2.1.2 When total load of each receiver is over 10A

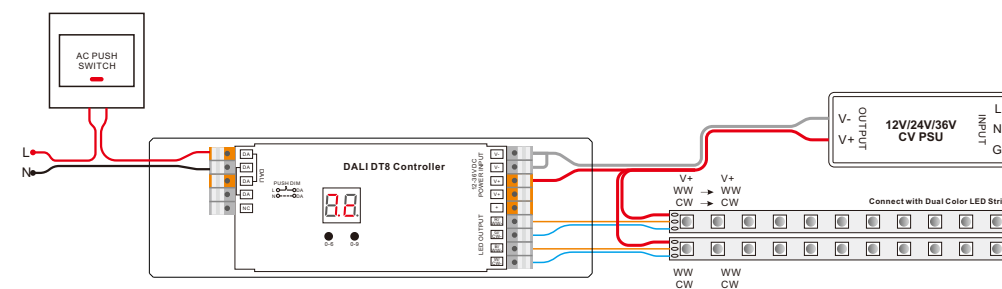


Note: only the 1st group CCT LED can be controlled under this mode.

2.2 When **H6** multi-addresses XY+Single Color(DT6) device type selected

2.2.1 When total load of each receiver is not over 10A

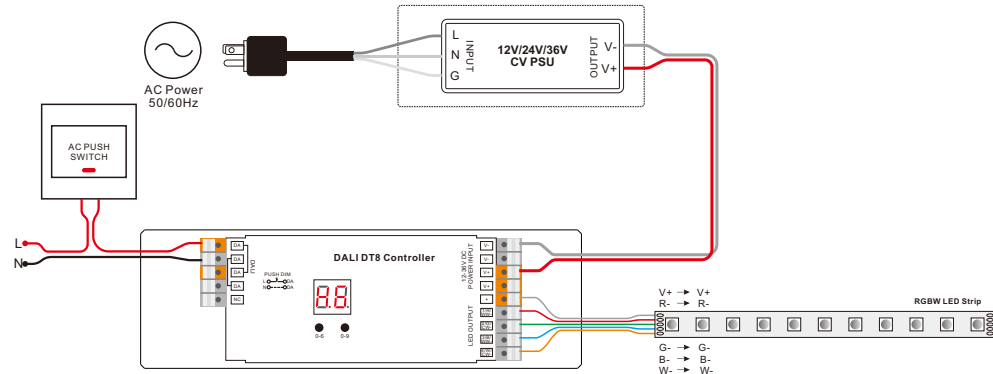


2.2.2 When total load of each receiver is over 10A

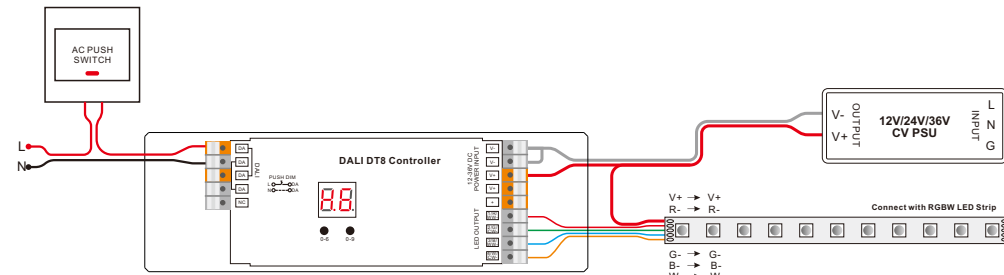


Note: only the RGB LED can be controlled under this mode.

2.3 When **H4** single-address XY device type selected

2.3.1 When total load of each receiver is not over 10A

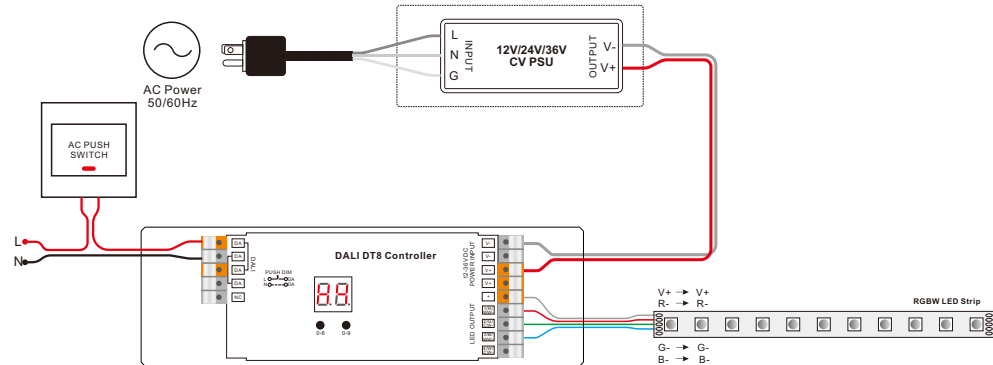


2.3.2 When total load of each receiver is over 10A

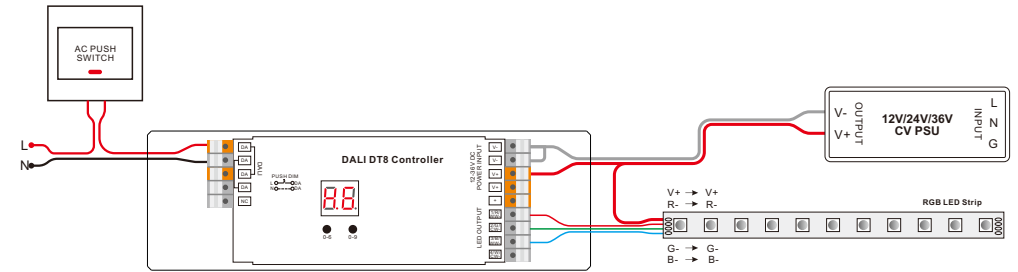


2.4 When **Tc** single-address Tc device type selected

2.4.1 When total load of each receiver is over 10A

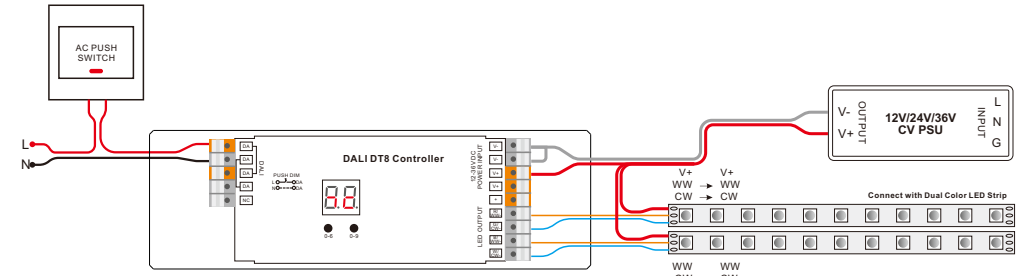


2.4.2 When total load of each receiver is not over 10A

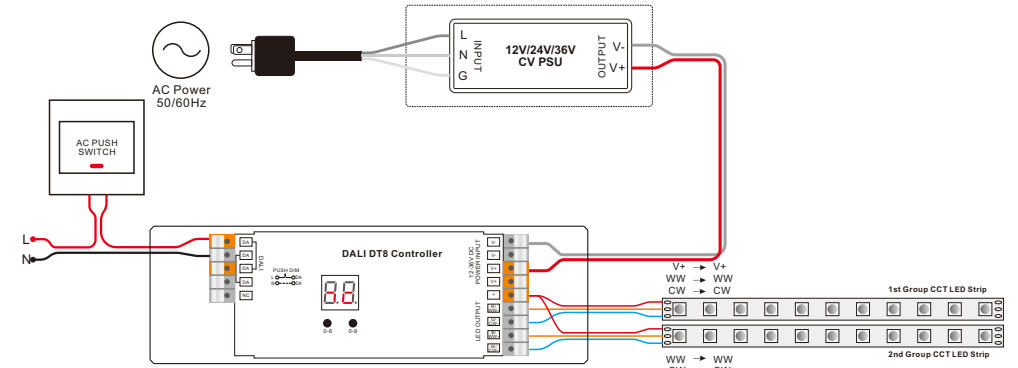


Note: 2 groups CCT LED are controlled together under this mode.

2.5 When single-address RGBWAF device type selected

2.5.1 When total load of each receiver is not over 10A

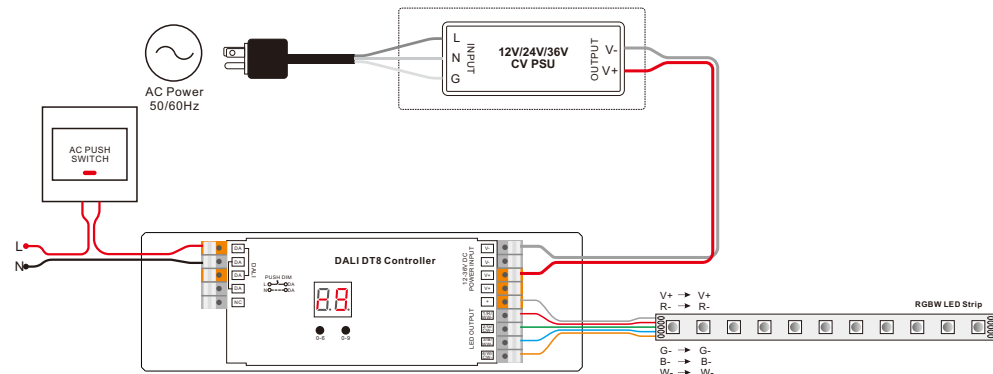


2.5.2 When total load of each receiver is over 10A

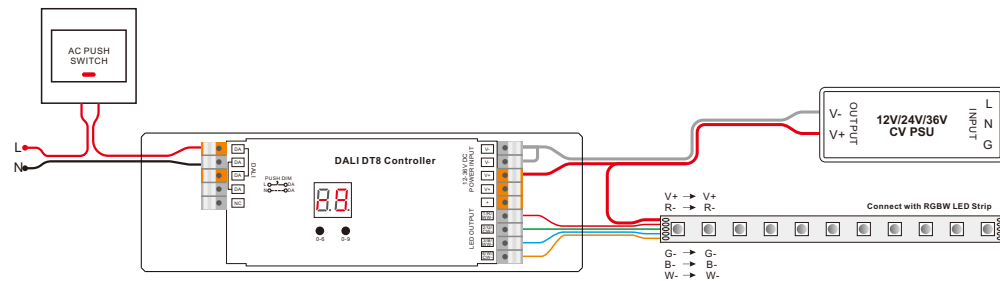


Note: brightness of both RGB & W LEDs can be controlled, color control only applicable to RGB LED under this mode.

2.6 When single-address DT6 device type selected

2.6.1 When total load of each receiver is not over 10A

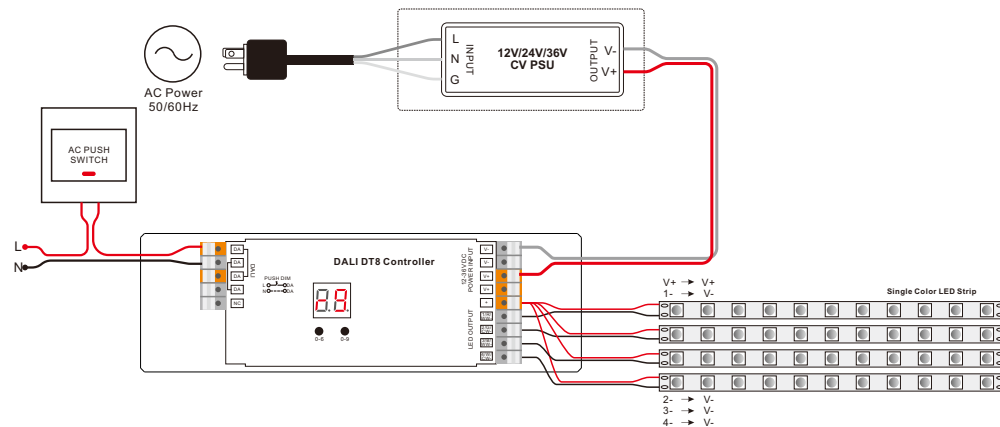

2.6.2 When total load of each receiver is over 10A

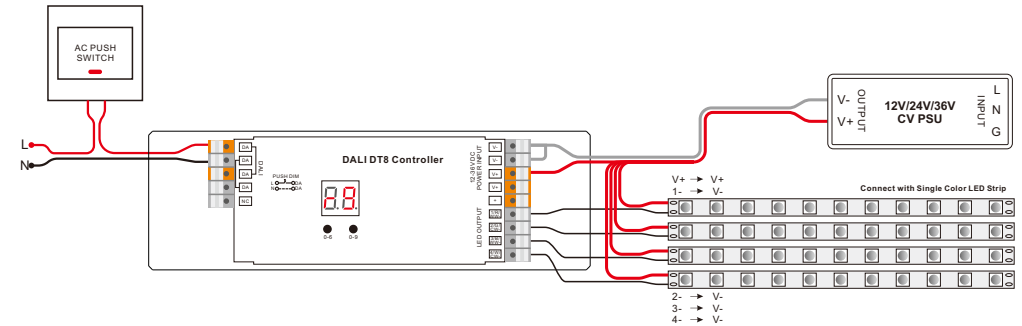

Note: all 4 channels are controlled together under this mode.

Conformity & Standards

- Radio Frequency Interference according to EN 55015:2013/A1:2015
- Immunity standard according to EN 61547:2009
- TÜV SÜD marked, CE marked

Product Dimension

