

679/A

679/AR

VERBINDUNGSKLEMME FÜR LEUCHTENARMATUREN TERMINAL BLOCKS FOR LIGHTING FIXTURES

Technische Daten


Technical data

- Pole - Poles	3P+E
- Nennstrom und Nennspannung - Rated current and voltage	6A-400V
- Maximale Betriebstemperatur (IEC) - Maximum operating temperature (IEC)	T85
- Schutzgrad - Protection index	IP20

Merkmale

Characteristics


- ...R= mit screwed earth facility
...R= with screwed earth facility
- Gehäuse aus polycarbonat, weiss
— White polycarbonate body
- Verzinnte Messingkontakte
— Internal part in tin plated brass
- Erdung aus vernickeltem Stahl
— Earth connection in nickel plated steel

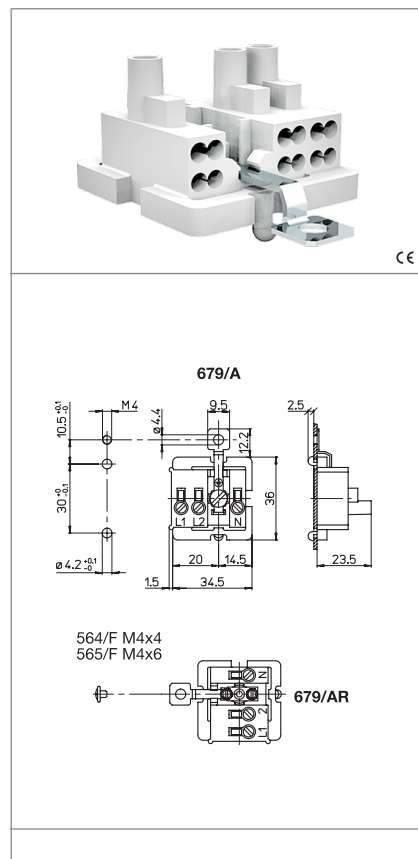

 Einteckbefestigung push-in fixing	 Blechstärke zur Befestigung fixing metal plate thickness 0,6-1,2	 Schraubkontakte screw terminals 1-2,5	 Klemme eingang: Schraubkontakte Klemme ausgang: Steckkontakt input side: screw output side: push wire
 Steckkontakte mit 4 Löchern push-wire terminals with 4 holes 0,5-1,5	 Abisolierung starre und flexible Leitungen rigid and flexible wires stripping 8-9	 Abisolierung von starren Leitern rigid wires stripping 8-9	 564/F M4x4 565/F M4x6

Prüfzeichen

Quality marks



Europäische Richtlinien

European directives

Gemäß "RoHS"
"RoHS" compliant
Unterliegt nicht "WEEE"
Not subject to "WEEE"

Gewichte und Verpackung

Weights and packaging

Art. Codice prodotti Product references	g Peso netto Net weight	n° pz per sacco per bag	n° pz per scatola per box	n° pz per cartone per carton
679/A	14,1	500	200	
679/AR	18	500		

Bemerkung

Notes