

LED Driver 60W DALI/Push dimmbar in 12V oder 24V ohne Klemmenabdeckung



Features:

- .Built-in constant voltage LED drive power supply
- .Built in push dimming
- .Comply to DALI 2.0 standard(IEC 62386-101,102,207)
- .Linear or log curve optional
- .Dimming range 1.0-100%
- .Open circuit, short circuit, overload, over temperature protection
- .For indoor lighting,office lighting
- .5 years warranty

Artikel-Nr.		EGDL60-12VFB	EGDL60-24VFB
Output	VOLTAGE RANGE	12VDC	24VDC
	RATED CURRENT	5MAX	2.5MAX
	Efficiency	> 88%	> 90%
	MAX OUTPUT POWER	60W	
	SETUP TIME	<0.55 sec.@230VAC	
	Dimming range	1.0-100%	
Input	Input mode	DALI OR PUSH DIMMING	
	VOLTAGE RANGE	220-240VAC	
	INPUT POWER	<69W	
	Input current	0.4A MAX	
	Inrush current	50A MAX	
Protection	OVER CURRENT	110-150%	
	OVER VOLTAGE	15VDC MAX	26VDC MAX
	OVER TEMPERATURE	Thermal lock	
	SHORT CIRCUIT	Hiccup mode auto-recovery	
Environment	WORKING TEMP.	-40~45℃	
	WORKING HUMIDITY	15~95% RH	
	STORAGE TEMP., HUMIDITY	-40~80℃, 10~95% RH	
	TEMP. COEFFICIENT	±0.05%/℃ (-10~45℃)	
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 30 min. each along X, Y, Z axes	
Safety&EMC	SAFETY STANDARDS	EN61347-1, EN61347-2-13	
	DALI STANDARDS	comply to DALI 2.0 standard(IEC 62386-101,102,207)	
	WITHSTAND VOLTAGE	I/P:-O/P:5.3KVDC 1mins	
	ISOLATION RESISTANCE	I/P:-O/P:50M Ohm/500VDC/25℃/70%RH	
	HARMONIC	comply to EN61000-3-2 CLASS C (100% load)	
	EMC EMISSION	comply to EN55015, FCC PART15 ClassB	
	EMC IMMUNITY	comply to EN61000-4-2、3、4、5、6、8、11; EN55024; EN61547	
Others	MTBF	5 years MIL-HDBK-217F (45℃)	
	DIMENSION		
	PACKING		

■ Dimming operation

1 Push dimming

Function	Push time
No status change	<0.05 sec.
Push on/off	0.1-1 sec.
Dimming up or down	1.5-10 sec.
Set 100% brightness	>1 sec.

Factory setting 100%

Each time press will change the dimming direction

2 DALI interface

DALI agreement includes 16 groups and 64 addresses

DALI agreement can be divided into 16 scenarios

■ Dimming connection diagram

The DALI wiring diagram





The PUSH dimming wiring diagram

Push Dimmer



Please select the suitable wires to ensure maximum voltage between two products should be no higher than 2V during synchronous parallel operation

Dimensions

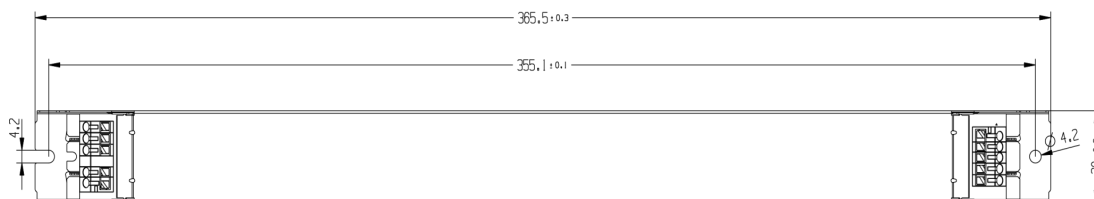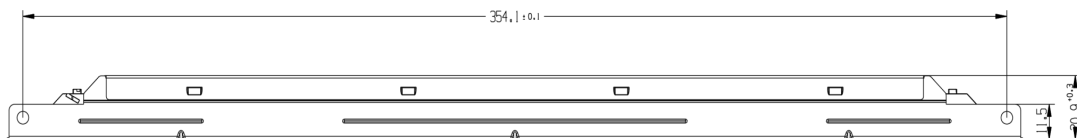

Pin function description

Functions	Description
DA	DA signal/AC Null Wire
DA	DA signal/connect it between AC Live Wire and switch
AC/N	AC Null Wire
AC/L	AC Live Wire
Vout+	Positive polarity
Vout-	Negative polarity