

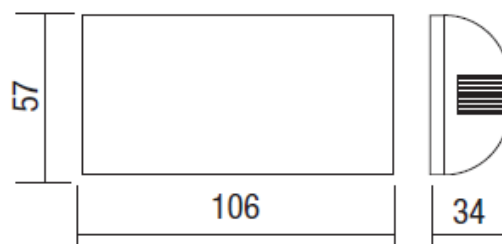


LED Lichtregler 230-12V LED 3-60W Halo 20-60W Sensor schwarz

Artikel-Nr. RL7327HALEDS

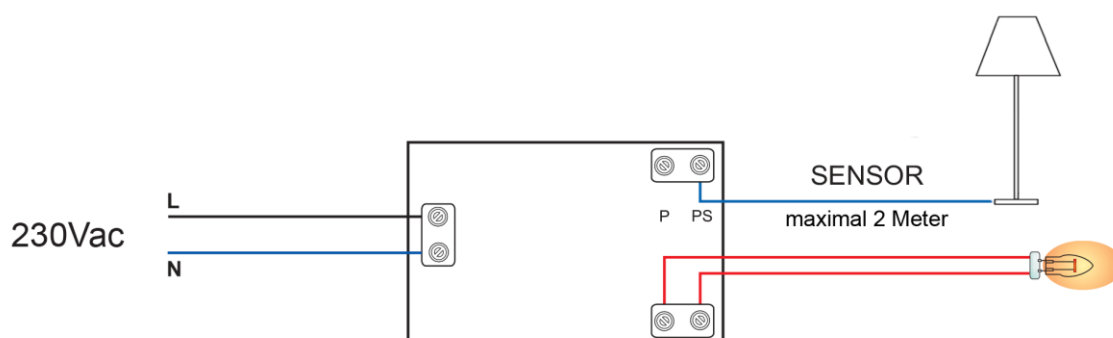

Leistung	LED 3-60W / Halo 20 - 60W
Dimmart	Sensor
Anwendungsbereich	12V AC
Farbe	schwarz
Abmessungen	106x57x34mm
Sensorleitung	max. 2 Meter

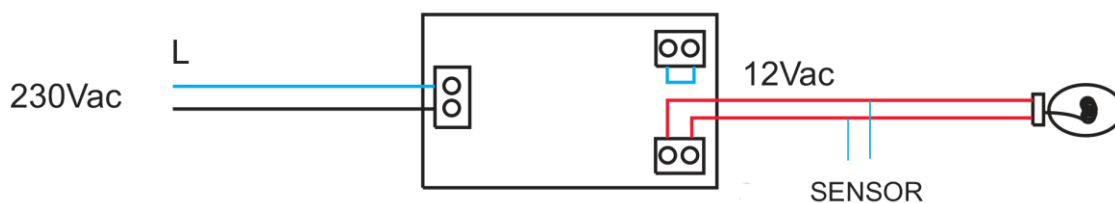

TRAFO VARIALUCE TOUCH HALO-LED TBT 12Vac - MAX 60W

TRAFO DIMMER TOUCH HALO-LED TBT 12Vac - MAX 60W

elektrogros ag
LED LICHTTECHNIK
LEUCHTENZUBEHÖR
A: Rütistrasse 18, CH-8952 Schlieren
T: +41 (0)44 730 56 56 W: www.elektrogros.ch
E: info@elektrogros.ch E: shop@elektrogros.ch



Lampada alogena tradizionale
Traditional halogen lamp
12Vac - 20÷60W



R111



G4




MR16

Lampada LED dimmerabile
Dimmable LED lamp
12Vac - 3÷60W
* Max 4 / 5 Lamps



Codice Code	LPH ↓mm	Vac IN	Carico Load	W	Hz	ta °C	Vout Vac	PCS	CCM cm³
RL7323HLEDS	106x57x34	220-240	HALO LED *	20÷60 3÷60	50/60	-15...35	12	25	6.800
RL7323HALEDST	106x57x34	220-240	HALO LED *	20÷60 3÷60	50/60	-15...35	12	25	6.800
RL7327HALEDPS	106x57x34	220-240	HALO LED *	20÷60 3÷60	50/60	-15...35	12	25	6.800



Caratteristiche tecniche

Trasformatore elettronico indipendente dimmerabile, per lampade alogene E LED

- Regolazione sensoriale o a pulsante continua
- Sensore indipendente dalla polarità di rete
- Distanza tra scheda e sensore: MAX 2 m
- Memoria d'intensità luminosa anche in assenza di rete
- Accensione graduale / Spegnimento graduale
- Accensione da presa comandata

Technical features

Dimmable independent electronic transformer halogen lamps and LED lamps

- Continuous sensorial or push button regulation
- No line plug polarity
- Maximum distance between circuit and control point 2 meters
- The light level is memorized unless the mains supply is cut off
- Soft start / Soft stop
- Switch-on from wall socket

S = Controllo a sfioramento - *Touch control*

PS = Controllo a sfioramento e pulsante
Touch and push button control



Trasformatore elettronico indipendente dimmerabile, per lampade alogene e LED dimmabili

- Regolazione sensoriale o a pulsante continua
- Sensore indipendente dalla polarità di rete
- Distanza tra scheda e sensore: MAX 2 m
- Memoria d'intensità luminosa anche in assenza di rete
- Accensione graduale / Spegnimento graduale
- Accensione da presa comandata

Installazione

L'alimentatore elettronico deve essere impiegato esclusivamente su apparecchi di illuminazione in classe III. Rispettare i dati di targa, posizionare l'alimentatore lontano da fonti di calore. Limitare a 2 metri la lunghezza del cavo di collegamento al carico.

Dimmable independent electronic transformer halogen and LED lamps dimmable

- Continuous sensorial or push button regulation
- No line plug polarity
- Maximum distance between circuit and control point 2 meters
- The light level is memorized unless the mains supply is cut off
- Soft start / Soft stop
- Switch-on from wall socket

Installation

Use exclusively with lighting fixtures in Class III. Respect plate values indicated, keep transformer far from direct heat sources. Distance of connecting cable to load should not exceed 2 metres.

