


LED-Band 9,6 W/m mit 2216-LEDs, mit IP-Schutz

LED strip 9,6 W/m with 2216-LEDs, with IP protection

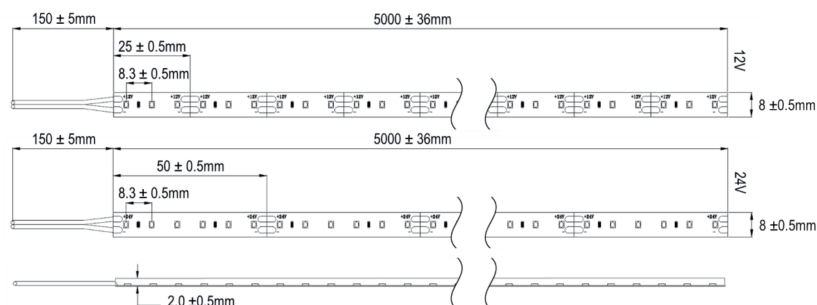

IP63 **CE**

		kaltweiß cool white	neutralweiß neutral white	warmweiß warm white	extrawarm extra warm
Artikelnummer 12 Vdc	Part no. 12 Vdc	808290	808291	808292	808293
Typ 12 Vdc	Type 12 Vdc	OSI12-10-965	OSI12-10-940	OSI12-10-930	OSI12-10-927
Artikelnummer 24 Vdc	Part no. 24 Vdc	808295	808296	808297	808298
Typ 24 Vdc	Type 24 Vdc	OSI24-10-965	OSI24-10-940	OSI24-10-930	OSI24-10-927
Leistung max.	Power max.	9,6 W/m			
Lichtstrom typ.	Luminous flux typ.	770 lm/m	740 lm/m	718 lm/m	708 lm/m
Farbtemperatur	Colour temperature	7300 K	4300 K	3300 K	2800 K
Farbwiedergabeindex	Colour rendering index	92	91	91	92
Ausstrahlwinkel	Viewing angle	130 °			
Max. Bemessungstemperatur (ts)	Rated max. temperature (ts)	60 °C			
Schutzart	Degree of protection	IP63			
Abmessungen	Dimensions	5000 x 8 x 2 mm			
Anzahl LEDs	Number of LEDs	120 /m			
Nenn-Eingangsspannung	Nominal input voltage	12 Vdc / 24 Vdc			
Länge einer Einheit	Length of a unit	25 mm / 50 mm			
Max. Länge nach Einspeisung	Max. length after feed-in	3 m / 6 m			

- 5 m flexibles LED-Band mit SMD-LEDs
- Selbstklebend (zusätzliche Befestigung wird empfohlen)
- Trennbar zwischen den Einheiten, mit Löt pads
- Muss zur Kühlung auf wärmeleitender Oberfläche montiert werden
- Bei Montage auf elektrisch leitendem Material bei den Anschlüssen auf Isolierung achten
- Biegeradius an Stellen mit Bauteilen min. 50 mm; ohne Druck ankleben
- Mit 15 cm Anschlussleitung

- 5 m flexible LED strip with SMD LEDs
- Self-adhesive (additional fixture is recommended)
- Divisible between units, with solder pads
- Must be installed on a heat-conducting surface for cooling purposes
- If installed onto a surface that conducts electricity, please ensure that the connections are insulated
- Bending radius in places with components min. 50 mm; attach without pressure
- With 15 cm connection cable