


Bewegungs- und Tageslichtsensor mit CASAMBI-Lichtsteuerung

Motion and daylight sensor with CASAMBI lighting control

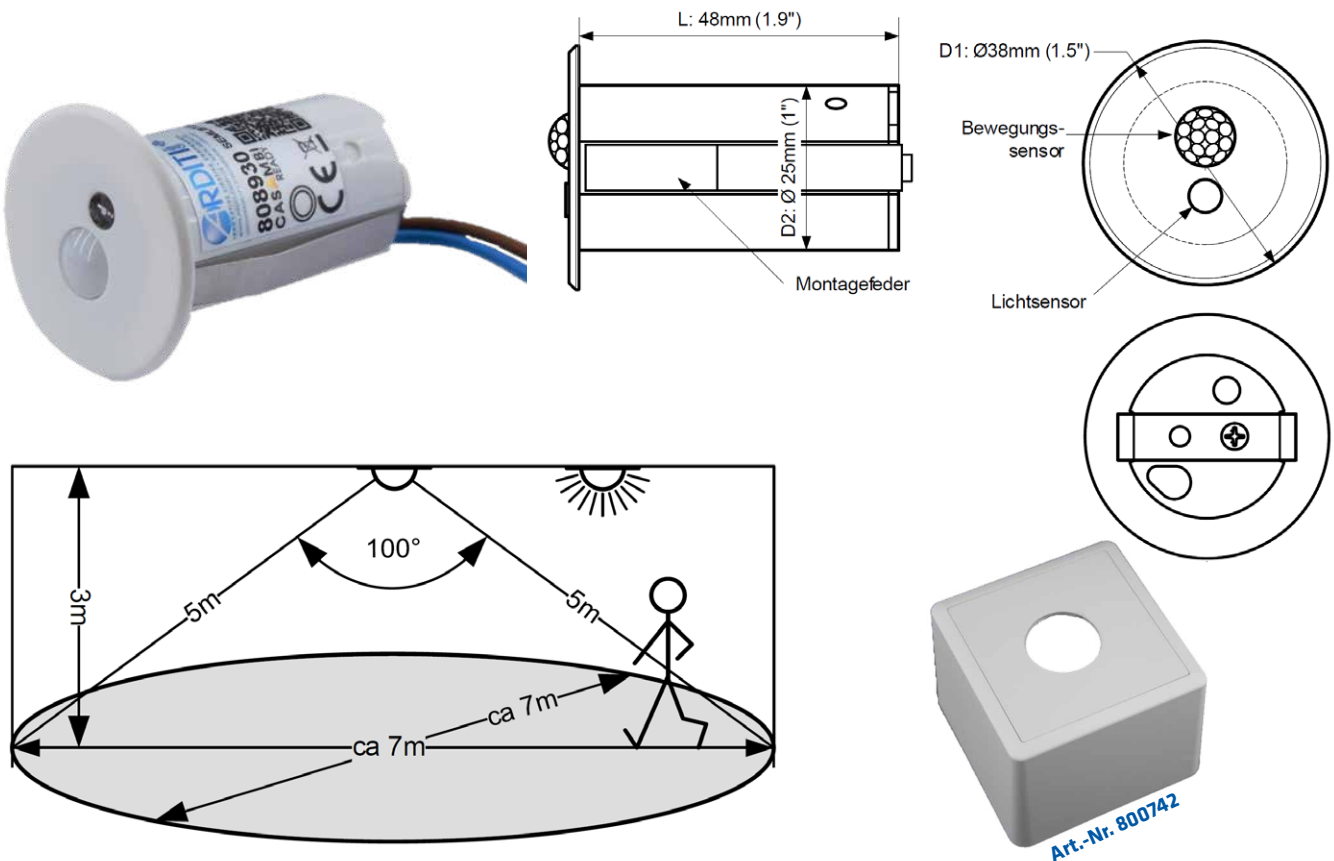

		weiß white	grau grey	schwarz black
Artikelnummer	Part no.	808930	808931	808932
Typ	Type	SEMLBT230W	SEMLBT230GR	SEMLBT230B
Versorgungseingang	Power supply input	220..240 Vac		
Frequenz	Frequency	50..60 Hz		
Funksignal	Radio signal	2,4..2,483 GHz; 4 dBm		
Umgebungstemperatur (ta)	Ambient temperature (ta)	-20..+50 °C		
Schutzart	Degree of protection	IP44 Front / IP20		
Abmessungen	Dimensions	38/25 x 48 mm		

- Netzspannungssensor für Bewegung und Tageslicht (PIR) zum komfortablen Bedienen mit Smart-Geräten und Steuerung von Geräten in CASAMBI-Netzwerken
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- Reichweite max. 5 m, 100° horizontal, 64 Zonen
- Einbaugerät, zur Montage in Dose oder Hohldecke, Bohrung 25..27 mm
- Aufputzgehäuse für den Sensor separat erhältlich, Art.-Nr. 800742

- Motion and daylight sensor (PIR) for mains voltage for convenient operation with smart devices and control of devices in CASAMBI networks
- Configurable with the CASAMBI app and usable in many ways
- Range max. 5 m, 100° horizontal, 64 zones
- Built-in device, to be mounted in flush mounted box or false ceiling, drill-hole 25..27 mm
- Surface-mounted housing for the sensor available separately, part no. 800742