


KNX zu CASAMBI / CASAMBI zu KNX Gateway

KNX to Casambi / Casambi to KNX Gateway

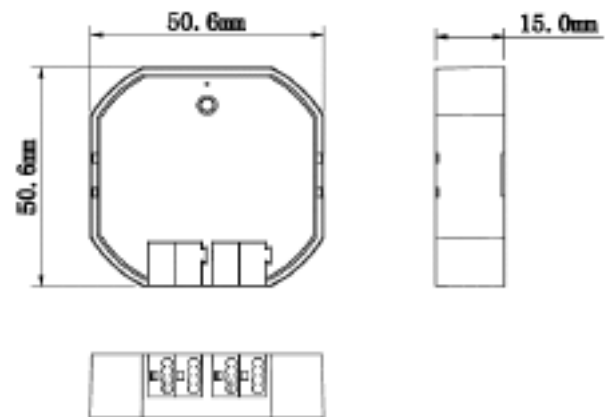

Einbau
built-in

808687

Artikelnummer	Part no.	808687
Typ	Type	gateway CBU-KNX2CASAMBI
Eingangsspannung	Input voltage	24-30Vdc
Funksignal	Radio signal	2,4..2,483 GHz ; 8dBm
Umgebungstemperatur (ta)	Ambient temperature (ta)	- 5 °C - 45 °C
Max. Bemessungstemperatur (tc)	Rated max. temperature (tc)	65 °C
Abmessungen	Dimensions	50,6 x 50,6 x 15mm

- Schaltet und dimmt aus KNX 16 frei programmierbare CASAMBI Szenen
- Bidirektionale Verbindung, 16 Statusprotokolle gehen zurück zur ETS
- Spannungsversorgung erfolgt durch den KNX Bus, zweites Klemmenpaar ist ohne Funktion
- Busseitige Programmierung benötigt die ETS Version 5 oder 6
- Die Programmier Taste wird zur Adressierung der KNX Adresse und zum Entkoppeln der CASAMBI Verbindung betätigt
- Die ETS Projektdatei mit entsprechender Produktdatei finden Sie auf unserer Website

- switching and dimming from KNX 16 freely programmable CASAMBI scenes
- Bidirectional connection, 16 report logs go back to ETS
- The power supply is provided by the KNX bus, the second pair of clamps is non-functional
- Bus programming requires ETS version 5 or 6
- The programming button is pressed to address the KNX address and to unpair the CASAMBI Device
- The ETS project file with the corresponding product file can be found on our website