
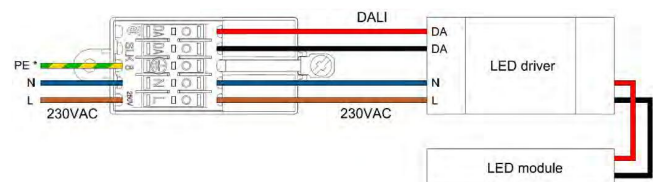


# Leuchtenklemme mit Casambi-DALI-Schnittstelle

*Luminaire terminal with Casambi-DALI-Interface*

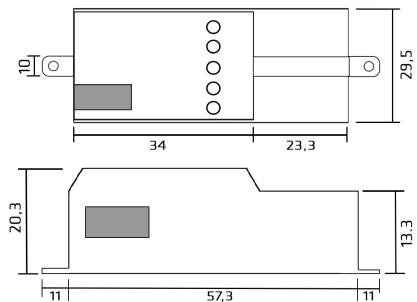

CASAMBI  
READY

**Leuchtenklemme  
Luminaire terminal**

Artikelnummer	Part no.	<b>808804</b>
Typ	Type	<b>IBTPRODA</b>
Eingangsspannung	Input voltage	220..240 Vac; 50 Hz
Funksignal	Radio signal	2,402..2,48 GHz; 8dBm
Signalausgang	Signal output	max. 6 DALI-Adressen, max. 20 mA
Umgebungstemperatur (ta)	Ambient temperature (ta)	70 °C
Schutzgrad IP	Degree of protection IP	IP20
Abmessungen	Dimensions	57,3 x 29,5 x 20,3 mm

- Casambi-steuerbare Eingangsklemme für Leuchten mit DALI-Betriebsgerät
- Mit der CASAMBI-App konfigurierbar und vielseitig nutzbar
- Gateway wird nicht benötigt, Einrichtung aber möglich
- Viele Betriebsmöglichkeiten durch einstellbare Profile
- Reichweite: Gebäude: bis 30 m, im Freien: bis 50 m
- Integrierte Antenne (Zeichnung: grauer Bereich, nicht mit Metallgehäuse abdecken)
- Netzklemmen bis 16 A
- Für 0,5 - 2,5 mm<sup>2</sup> eindrähtige Leiter, 1,5 - 2,5 mm<sup>2</sup> starre mehrdrähtige Leiter; oben: für 0,5-2,5 flexible Leiter
- Mit Erdungslasche
- Profilwechsel möglich. (Einzelkanäle, RGB,TW, Gruppen)  
Unterstützt Dali DT6 & DT8

- Casambi controllable input terminal for luminaires with DALI controlgear
- Configurable with the CASAMBI app and usable in many ways
- You can setup a gateway, but it is not necessary
- Many operation modes by settable profiles
- Radion range: indoor: up to 30 m, outdoor: up to 50 m
- Integrated antenna (drawing: grey marking, do not cover with metal housing)
- Mains connectors up to 16 A
- For 0.5 - 2.5 mm<sup>2</sup> solid conductors, 1.5 - 2.5 mm<sup>2</sup> rigid stranded conductors; above: for 0.5-2.5 flexible conductors
- With earthing strap
- Profile change possible. (Individual channels, RGB, TW, groups)  
Supports Dali DT6 & DT8