



Ballast elettronico ad alta frequenza per lampade fluorescenti.

- Provvisto di morsetti a vite.
- Lunghezza max cavi lampada cm 100.
- Invulcro in Classe 2 con coprimorsetti e serracavi.
- Accensione con preriscaldamento dei catodi adatto per accensioni frequenti.
- Risparmio di energia del 25% rispetto ai ballast convenzionali. Assenza dell'effetto stroboscopico.
- Disponibili a richiesta versioni a 120V Ac.

Protezioni:

lampada scollegata, catodi interrotti, fine vita lampada e effetto rettificante.

Norme di riferimento:

Sicurezza: EN 61347-1; EN 61347-2-3
Radio disturbi: EN 55015; EN 55015-A1; EN 55015-A2
Armoniche: EN 61000-3-2
Immunità: EN 61547
Prestazioni: EN 60929.

High frequency electronic ballast for fluorescent lamps.

- Equipped with screw terminal.
- Max length lamp cables cm 100.
- Class 2 case with terminal blocks and cable clamps.
- Cathodes pre-heating, suitable for frequent lighting.
- 25% energy saving compared to conventional ballasts.
- No flickering.
- 120V AC versions available on demand.

Protections:

lamp disconnection, cathodes breaking, lamp end of life and rectifying effect.

Standard reference:

Safety: EN 61347-1; EN 61347-2-3
Radio Interferences: EN 55015; EN 55015-A1; EN 55015-A2
Harmonics: EN 61000-3-2
Immunity: EN 61547
Performance: EN 60929.

Articolo Article	V	A	Hz	W Lamp	W max	λ	ta °C	tc °C	LPH ↓1mm			Codice Code
S/BCFE/8	220÷240	0,03÷0,10	50÷60	4÷8	11,0	> 0,6c	-10÷50	88	34x115x19	10	64	S/BCFE/8
S/BCFE/14	220÷240	0,05÷0,12	50÷60	8÷14	14,7	> 0,6c	-10÷50	88	34x115x19	10	64	S/BCFE/14
S/BCFE/21	220÷240	0,12÷0,20	50÷60	18÷21	23,0	> 0,6c	-10÷50	88	34x115x19	10	64	S/BCFE/21
S/BCFE/24	220÷240	0,12÷0,21	50÷60	18÷26	24,8	> 0,6c	-10÷50	88	34x115x19	10	64	S/BCFE/24

Lampade - Lamps


BCFE/8				
TYPE	OSRAM	PHILIPS	W	SOCKET
T5	L	-	4	G5
T5	L	-	6	G5
TC-SEL	DULUX S/E	PL-S/4p	5	2G7
TC-SEL	DULUX S/E	PL-S/4p	7	2G7
T2	FM	-	6	W4,3
T2	FM	-	8	W4,3

BCFE/14				
TYPE	OSRAM	PHILIPS	W	SOCKET
T5	FH	TL5 HE	14	G5
T5	L	TL	8	G5
T5	L	TL	13	G5
TC-DEL	DULUX D/E	PL-C/4p	10	G24q1
TC-DEL	DULUX D/E	PL-C/4p	13	G24q1
TC-TEL	DULUX T/E	PL-T/4p	13	Gx24q1
TC-SEL	DULUX S/E	PL-S/4p	9	2G7
TC-SEL	DULUX S/E	PL-S/4p	11	2G7
T2	FM	-	11	W4,3
T2	FM	-	13	W4,3

BCFE/21				
TYPE	OSRAM	PHILIPS	W	SOCKET
T5	FH	TL5 HE	21	G5
TC-DEL	DULUX D/E	PL-C/4p	18	G24q2
TC-TEL	DULUX T/E	PL-T/4p	18	Gx24q2

BCFE/24				
TYPE	OSRAM	PHILIPS	W	SOCKET
T5	FQ	TL5 HO	24	G5
TC-L	DULUX L	PL-L	18	2G11
TC-L	DULUX L	PL-L	24	2G11
TC-F	DULUX F	-	18	2G10
TC-F	DULUX F	-	24	2G10
T8	L	TD-L	18	G13
TC-DEL	DULUX D/E	PL-C/4p	26	G24q3
TC-TEL	DULUX T/E	PL-T/4p	26	Gx24q3
T5C	FC	TL5C	22	2Gx13
TR	L..C	TL-E	22	G10q

Dimensioni (mm) - Dimensions (mm)

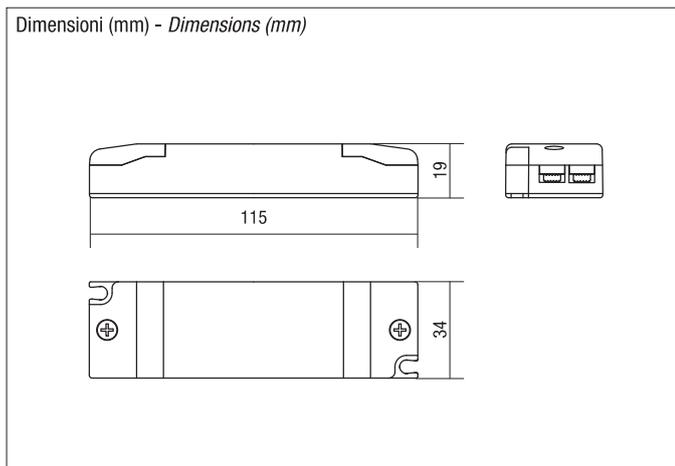

Alimentatori per lampade FLUORESCENTI - Ballast for FLUORESCENT lamps