

## Niedervoltfassung 12 - 24V




**Artikel**

**P75**

**Clamp lampholder  
for lamp with base:**

**G4 - GZ4 - G5.3 -  
GX5.3 -GU5.3  
G6.35 - GY6.35 - GZ6.35**

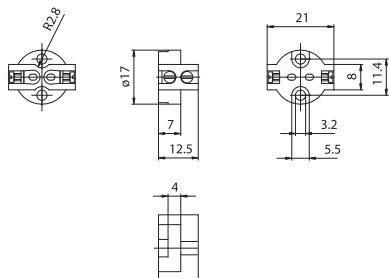

**P75**

Rated voltage:  
Rated current:  
Working temperature:  
Connected cables  
working temperature:

**24 V  
10 A  
T 350°C  
T 90°÷ 250°C**

Single-conductor flexible cables to be connected to the lampholder:  
(Suggested arrangement with crimped end-terminal):

Insulation	T in °C	Conduct.	Available sections in mm²			
			0,50	0,75	1,00	1,50
Silicone <i>Single insulation</i>	180	CuSn	•	•	•	•
Silicone+glass-braid <i>Single insulation</i>	180	CuSn	•	•	•	•
FEP <i>Single insulation</i>	180	CuSn	•	•	•	•
PTFE <i>Single insulation</i>	180	CuSn	•	•	•	•
PTFE <i>Single insulation</i>	250	CuNi	•	•	•	•
PFA <i>Single insulation</i>	260	CuNi	•	•	•	