

LED Driver 24V 100W CASAMBI dimmbar

Artikel-Nr. EGCL100-24VF

Dimensionen: 337x30x18.2 mm

Characteristics



- European AC input range (220-240VAC)
- With active PFC function
- Waterproof rating IP20
- CASAMBI dimming driver
- Built-in press dimming function
- Dimming range 1-100%
- Suitable for dry indoor environments
- Protection type: short circuit/over temperature/over voltage protection
- Plastic case
- Comply with world lighting equipment safety regulations



Standards


EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493

Specifications

Model		EGCL100-12VF	EG CL100- 24VF	EG CL100- 48VF
Output	turn on time(S)	<0.5	<0.5	<0.5
	output power(W)	100	100	100
	output voltage(V)	12	24	48
	output voltage tolerance	≤±5%	≤±5%	≤±5%
	ripple voltage(mV)	150mV	240mV	400mV
	Line Regulation	1%	1%	1%
	Load Regulation	2%	1%	1%
	working current range(A)	0-8.33	0-4.16	0-2.08
	SVM		0.1	
	Pst		0.1	
Input	dimming type		YES	
	dimming range		1-100%	
	rated DC supply voltage(Vdc)		NA	
	rated supply voltage(Vac)		220-240	
	voltage range(Vac)		198-264	
	line frequency(Hz)		50/60	
	input current(A)		0.7	
	efficiency (TYPE)	92.5%@full load	93.5%@full load	93.5%@full load
	average efficiency(TYPE) 3	91.5%	92 %	92 %
	no load power consumption(W)		≤0.5W	
Protection	power factor		0.95@full load	
	Displacement factor		0.95	
	THD(typ.) THD (Type)		5.5%	
	inrush current(Ipk) (Ipk)		80A/260uS	
	Leakage current (mA)		0.7@240Vac 60Hz	
	short circuit protection		hiccup mode, restart automatically after fault correction.	
	over load protection		hiccup mode, restart automatically after fault correction.	
	Over voltage protection		Yes(latch off)	
	Over temperature protection		Yes(latch off)	
	surge capacity		L-N: 1KV	
	Withstand voltage		Input-Output: 3000V/5mA/1min	
	Ta(C)		-20...45	
	Tc max.(C)		max.85	
	Storage Temperature(C)		-30...80	


Ambient and Life	ambient humidity range	5%...85%RH, Not condensing		
	nominal life-time (hrs)	50'000@Ta 336.6mm*30mm*18.2mm		
Other	dimensions (L×W×H) (mm)			
	weight(g)	220	190	190
	casing material	Plastics		
	housing colour	white		
	type of protection	IP20		
	protection class	class II		
	certificate			
Note	<p>1. Tolerance: including setting tolerance, linear adjustment rate and load adjustment rate.</p> <p>2. Tested under full load and 230Vac. Refer to the "Power Factor" and "Efficiency" graphs.</p> <p>3. To calculate the average efficiency of the product, test the voltage at 100%, 75%, 50%, and 25% of the rated current, and then obtain the average of the four values through the arithmetic mean method.</p> <p>4. All parameters not specifically mentioned are measured at rated voltage input, rated load and 25°C ambient temperature.</p> <p>5. A power supply is a component used in conjunction with the final device. Since EMC performance will be affected by the complete installation, the final equipment manufacturer must reconfirm that the equipment after complete installation complies with the EMC directive.</p> <p>PUSH push-type dimming (PUSH dimming only requires a single connection, and when multiple units are dimmed collaboratively, only APP settings are required).</p> <p>Dimming: long press (dimming).</p> <p>Switch: short press (ON/OFF).</p>			

Dimensions(mm)

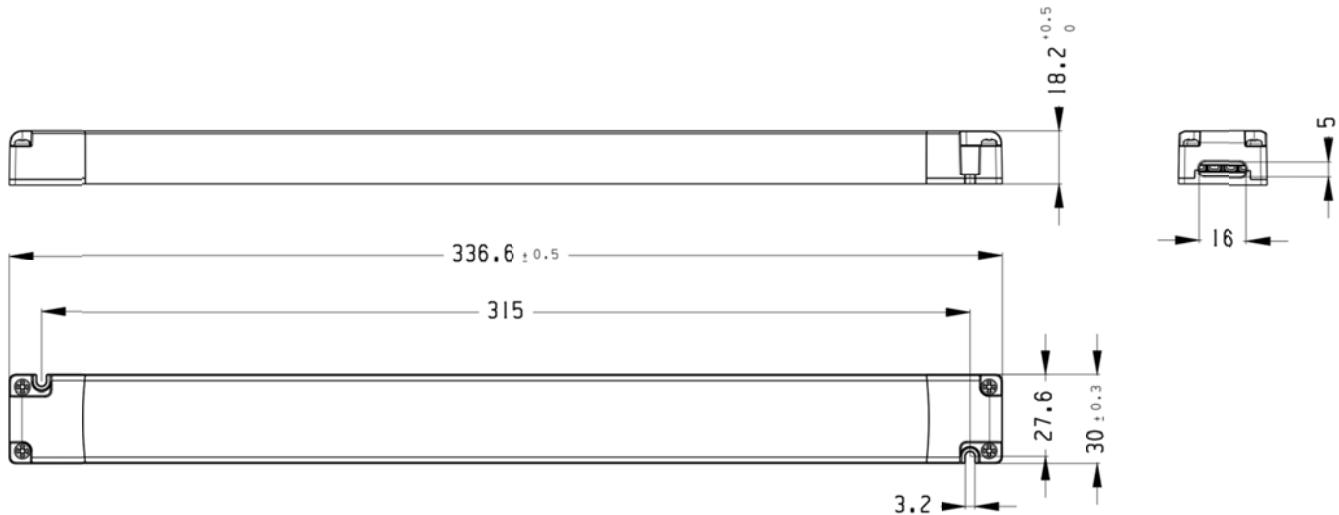


Wiring Diagram

CASAMBI

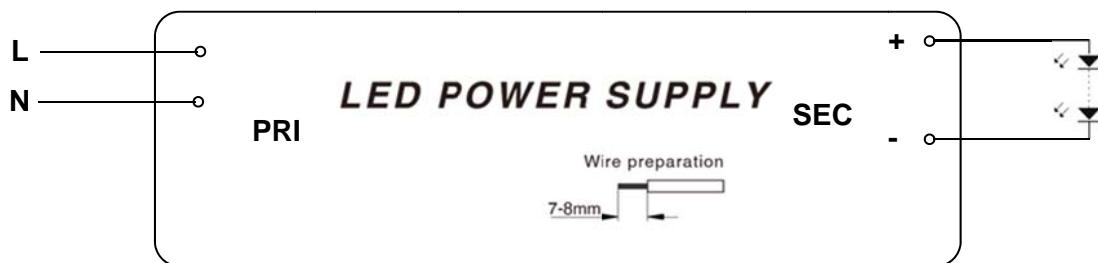

PUSH

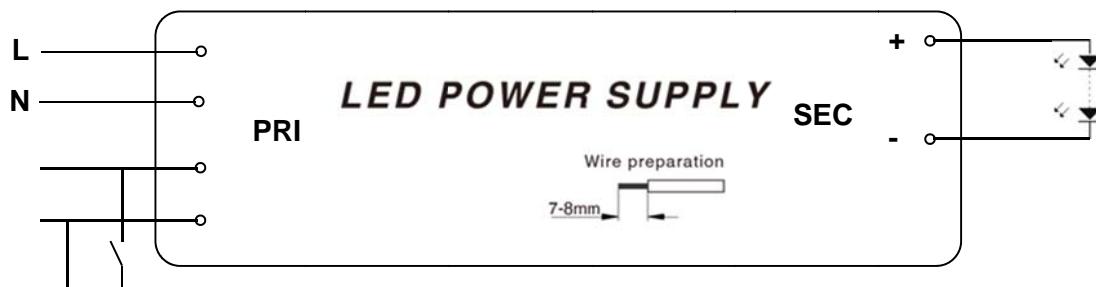

PUSH DIM

AC	H03VVH2-F 2*0.75mm ²
DC	H03VVH2-F 2*0.75mm ² (24/48V) H05VVH2-F 2*1.0mm ² (12V)

Electrical curves

Fig. 1 Output load-Temperature curve

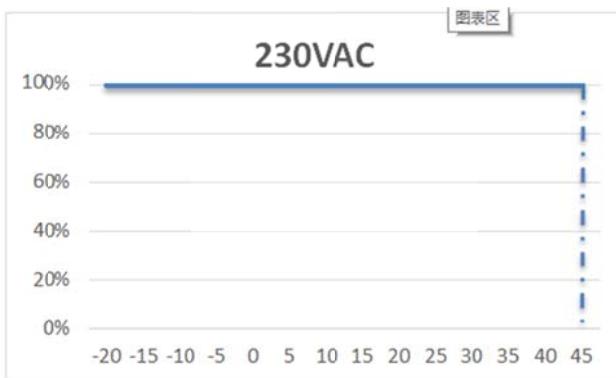


Fig. 2 Static characteristic curve

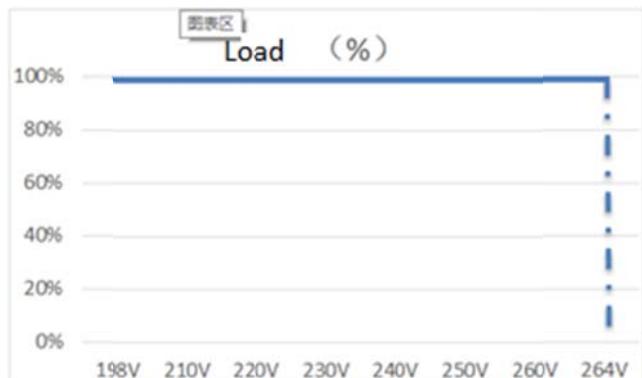


Fig. 3 I-V curve

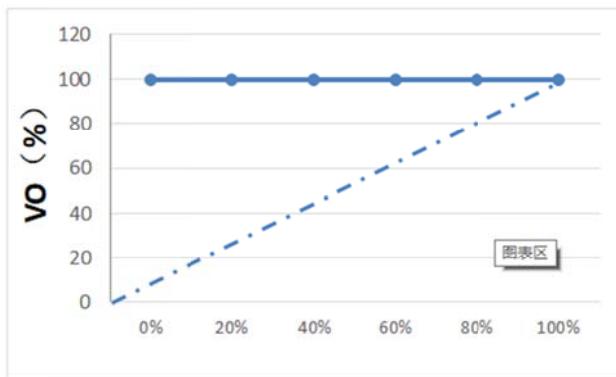


Fig. 4 Power factor characteristic curve

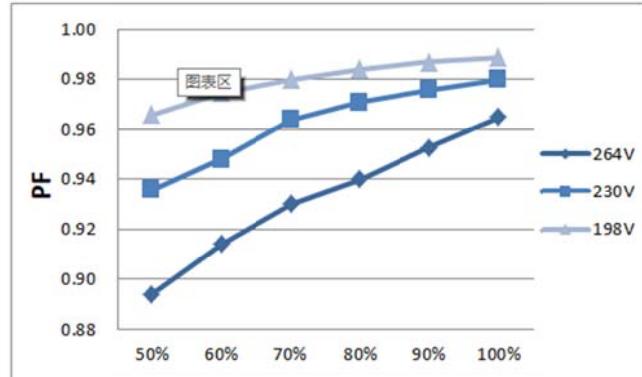


Fig. 5 Total harmonic distortion curve (THD)

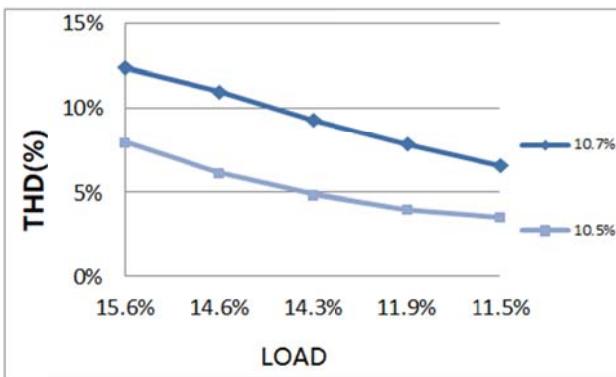


Fig. 6 Efficiency-Load curve

