

LED Module AR111 CHAMELEON

CRI >90

-85%
ENERGY



Dimmerabile con alimentatore a corrente costante
Dimmable with constant current power supply

LED CHAMELEON NEW 25W
HL111 - G53







Codice Code	mA	W MAX		K	N° LED	DIM	Vdc	Nominal Lm (Tc =25°C)	Lm Output	Lm/W
R111/25/25/BC	700	25	25°	3000	1	OK	37	3.825	3.000	120
R111/25/40/BC	700	25	40°	3000	1	OK	37	3.825	3.000	120
R111/25/60/BC	700	25	60°	3000	1	OK	37	3.825	3.000	120
R111/25/25/BN	700	25	25°	4000	1	OK	37	3.825	3.000	120
R111/25/40/BN	700	25	40°	4000	1	OK	37	3.825	3.000	120
R111/25/60/BN	700	25	60°	4000	1	OK	37	3.825	3.000	120
R111/25/25/27	700	25	25°	2700	1	OK	37	3.825	3.000	120
R111/25/40/27	700	25	40°	2700	1	OK	37	3.825	3.000	120
R111/25/60/27	700	25	60°	2700	1	OK	37	3.825	3.000	120

A richiesta: colorazione 5000K per min. 100 pz - **On request: 5000K coloring for min. 100 pcs**

LED Chameleon - Dimensions (mm)

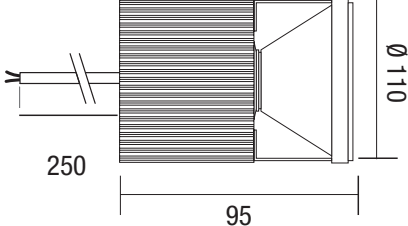

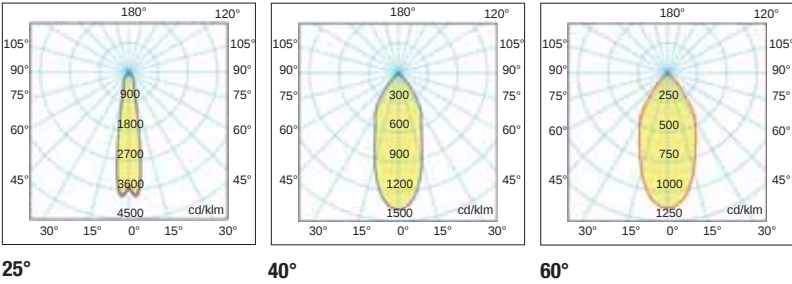

LED CHAMELEON NEW 50W
HL111 - G53







Codice Code	mA	W MAX		K	N° LED	DIM	Vdc	Nominal Lm (Tc =25°C)	Lm Output	Lm/W
R111/50/25/BC	1400	50	25°	3000	1	OK	37	7.650	6.010	120
R111/50/40/BC	1400	50	40°	3000	1	OK	37	7.650	6.010	120
R111/50/60/BC	1400	50	60°	3000	1	OK	37	7.650	6.010	120
R111/50/25/BN	1400	50	25°	4000	1	OK	37	7.650	6.010	120
R111/50/40/BN	1400	50	40°	4000	1	OK	37	7.650	6.010	120
R111/50/60/BN	1400	50	60°	4000	1	OK	37	7.650	6.010	120
R111/50/25/27	1400	50	25°	2700	1	OK	37	7.650	6.010	120
R111/50/40/27	1400	50	40°	2700	1	OK	37	7.650	6.010	120
R111/50/60/27	1400	50	60°	2700	1	OK	37	7.650	6.010	120

A richiesta: colorazione 5000K per min. 100 pz - **On request: 5000K coloring for min. 100 pcs**

LED Chameleon - Dimensions (mm)

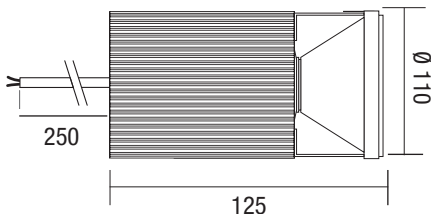

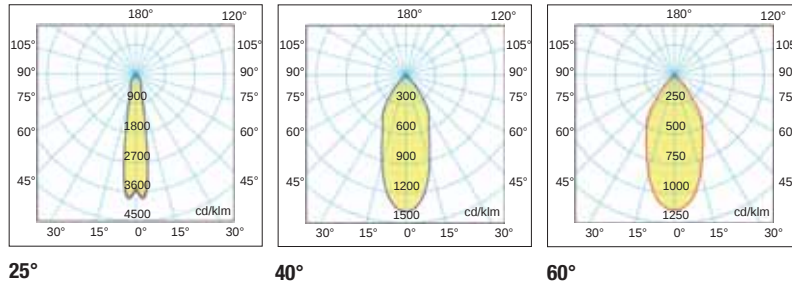

LED CHAMELEON NEW 25W	
mA	W
350	13
500	18
600	22
700	25

LED CHAMELEON NEW 50W	
mA	W
800	29
900	32
1000	36
1100	40
1200	43
1300	47
1400	50

