

MINILED - 50W - 75W - 90W



Alimentatore elettronico MINILED VDT

- Uscita in tensione costante
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti
- Grado di protezione IP64
- Apparecchiatura per uso indipendente
- PFC attivo
- Fornito di cavo sul primario e cavo sul secondario
- Entrata e uscita contrapposta
- Protezioni: Termica, sovraccarico, sovratensione e cortocircuito
- VDT connessione moduli in PARALLELO

Norme di riferimento:

- Sicurezza: EN 61347-1; EN 61347-2-13
 Radio disturbi: EN 55015; EN 55015-A1; EN 55015-A2
 Armoniche: EN 61000-3-2
 Immunità: EN 61547
 Prestazioni: EN62384


MINILED - VDT - power supply

- Constant voltage output
- Class II protection against electric shock following direct or indirect contact
- Protection degree IP64
- Independent driver
- Active Power Factor Corrector
- Equipped with cable on the primary and the secondary
- Driver can be secured with slot for screws
- Protection: thermal, overload, overvoltage and short circuit
- VDT connection modules in PARALLEL

Standard reference:

- Safety: EN 61347-1; EN 61347-2-13
 Radio interferences: EN 55015; EN 55015-A1; EN 55015-A2
 Harmonics: EN 61000-3-2
 Immunity: EN 61547
 Performance: EN62384

Dimensioni (mm) - Dimensions (mm)

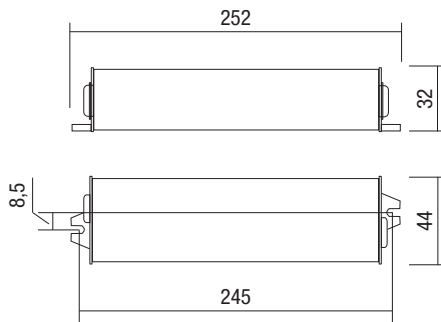

Articolo Article	V	Hz	W	V _{OUT}	ta °C	tc °C	LPH ↓mm		Codice Code
MINILED 12 - 50W	220÷240	50÷60	50	12 dc	50	85	252x44x33	1	24379
MINILED 24 - 50W	220÷240	50÷60	50	24 dc	50	85	252x44x33	1	24375
MINILED 24 - 75W	220÷240	50÷60	75	24 dc	50	85	252x44x33	1	24371
MINILED 24 - 90W	220÷240	50÷60	90	24 dc	50	85	252x44x33	1	24377

Fixed output VDT

Miniled