


CASAMBI Leuchtmittel GU10 4.9W 2200K - 4000K

Art. 808170



A: Rütistrasse 18, CH-8952 Schlieren
T: +41 (0)44 730 56 56 W: www.elektrogros.ch
E: info@elektrogros.ch E: shop@elektrogros.ch

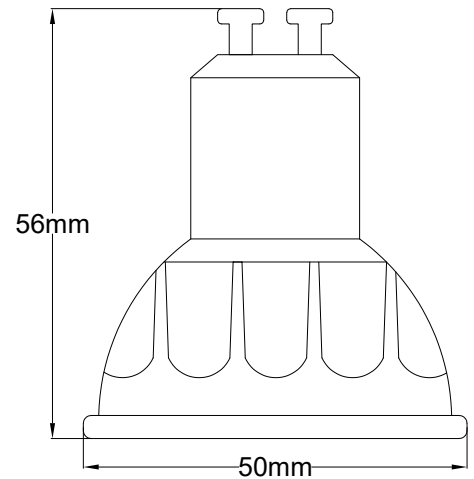

Technical Information

Voltage	220-240V, 50/60Hz
Output	410lm
Wattage	4.9W
Color Temperature	2200-4000K (Tuneable white)
CIE Metrics	CRI=93, R9=90
TM30 Metrics	Rf=88, Rg=99
Whiteness Index	Rw=100
Beam Angle	28°
Energy Efficiency	F
<u>Operating Temperature:</u>	
Minimum	-20° C (ambient)
Typical	67° C (base)
Maximum	80° C (base)
<u>Profiles:</u>	
37513	Single Color 2200K
37514	Single Color 4000K
37515	TW (for fully enclosed fixture)
25019	GU10 Standard TW
Dimensions	56 x 50mm
Control Range*	20m
Dimming	Dim and CCT by Casambi app
Protection	IP20
Color Finish	White (W)
Applications	Hotels & Hospitality, Galleries & Museums High-End Retail
Certificates	CE (EN62560, EN62479, EN55015, EN6100-2-3, EN61547)

Description

The Casambi GU10 LED Bulb is a Casambi-enabled, energy-efficient lighting solution perfect for a variety of indoor applications. It offers high color rendering and exceptional beam quality, making it ideal for settings requiring precise and vibrant illumination. Available in beam angle of 28/40/60 degree, this bulb features Casambi compatibility and a Tuneable White (TW) function, allowing for flexible lighting control and customization.

GU10 bulbs are energy-efficient and deliver excellent illumination output. Their high CRI and R9 values provide vivid and accurate color representation, making them a great option for color-critical applications.

**Installing the bulb inside metal enclosure can reduce the control range*



THERMAL COMPATIBILITY

Suitable for use in enclosed fixtures, as long as it complies with the maximum heatsink temperature limits stated in this datasheet (80°C Max.).

When installing the bulb inside a enclosed fixture we recommend to use profile #37515, this profile will set the bulb power limit to 3.5W.


INTENDED USE & LOCATION RATING

Intended for use in MR16 GU10 compatible recessed downlights, track lighting and other indoor applications. Suitable for damp locations, not rated for use in wet locations.


LIFETIME & WARRANTY

Rated lifetime to L70: 25,000hrs


Warranty: 2yrs

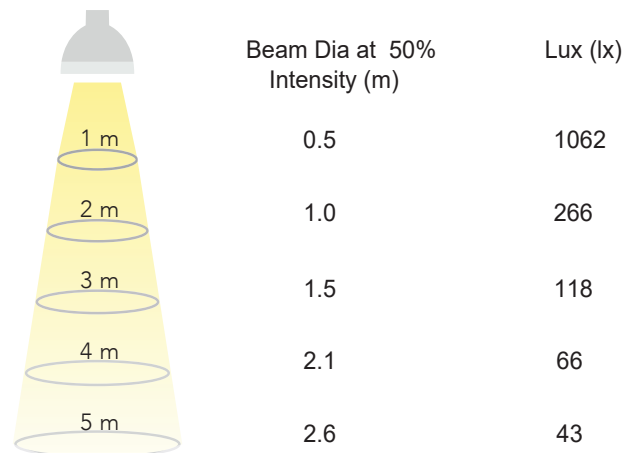

GU10 Bulb with enclosed fixture (Max. 80° C)*

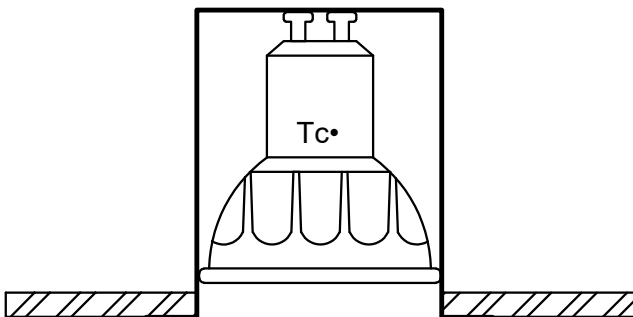

GU10 Bulb with open back fixture (Max. 80° C)

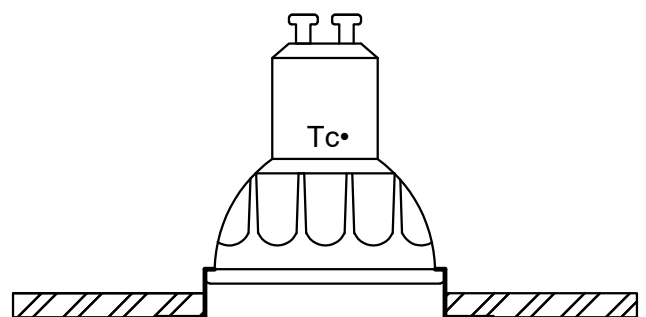

We recommend to use fixture ID #37515 when installing the bulb inside fully enclosed fixture.

**Subject to the maximum heatsink temperature limit*

**Installing the bulb inside metal enclosure can reduce the control range*