

# Moduli LED LED modules




**POWER  
LED  
3W  
700mA**

**Constant  
Current  
700mA**

LIGHT INJECTOR

OLJ/F14/LF6/LT - OLJ/F14/LF30/LT - OLJ/F14/LF45/LT

**CDT**

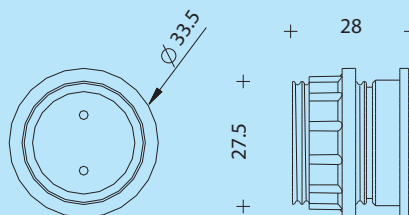

OLJ/F14/LF6/LT OLJ/F14/LF30/LT OLJ/F14/LF45/LT		/R	/G	/BL	/V	/B	/BC	
Colore Color		Rosso Red	Giallo Yellow	Blu Blue	Verde Green	Bianco White	Bianco C. W. White	
Numero LED LED number	n	1						
Corrente nominale LED Nominal LED current	mA	700						
Tensione massima LED Maximum LED voltage	V	4			4,5			
Potenza massima LED Maximum LED power	W	2,8			3,15			
Ta max. @ corrente nominale Max Ta @ nominal current	°C	60			55			
Flusso luminoso nominale Nominal luminous flux	lumen	77	60	21	102	102	78	
Apertura angolare Viewing angle	°	6/30/45						
Lunghezza d'onda nominale Nominal wave length	nm	625	540	470	530			
Temperatura di colore nominale Nominal color temperature	°K					6300	3150	
Dimensioni Dimensions	mm	33,5x28						
Peso Weight	g	26						
Imballo Packaging		10						
Istruzioni di cablaggio Wiring instructions		disponibile su <a href="http://www.vlm.it">www.vlm.it</a> available on <a href="http://www.vlm.it">www.vlm.it</a>						

Minispot in metallo con lente incorporata e un LED di potenza da 3W~ a 700 mA.

Provvisto di filettatura E14 con ghiera di fissaggio. Da utilizzarsi con alimentatori elettronici VLM CDT a corrente costante 700 mA.

Tre versioni:

OLJ/F14/LF6/LT con lente incorporata da 6°

OLJ/F14/LF30/LT con lente incorporata da 30°

OLJ/F14/LF45/LT con lente incorporata da 45°.

Connessione con cavi unipolari lunghezza 25 cm.

I moduli sono caratterizzati considerando una vita media di 50.000 ore.

**Attenzione:** connettere esclusivamente in serie.

*Metal minispot with built-in lens and a high power 3W LED at 700 mA.*

*E14 threaded body with fixing ring.*

*To be used with 700 mA constant current VLM CDT power supply.*

*Three versions:*

*OLJ/F14/LF6/LT with built-in 6° lens*

*OLJ/F14/LF30/LT with built-in 30° lens*


*OLJ/F14/LF45/LT with built-in 45° lens.*

*Wire connection with single pole 25 cm cables.*


*Modules characterization is based on average life time of 50.000 hours.*

**Warning:** serial connection only.

## OLJ/F14/LF6/LT



## OLJ/F14/LF30/LT



## OLJ/F14/LF45/LT

