


Zugentlaster mit Madenschraube

Art. 5346/11/26 = schwarz

Art. 5346/11/26 = weiss

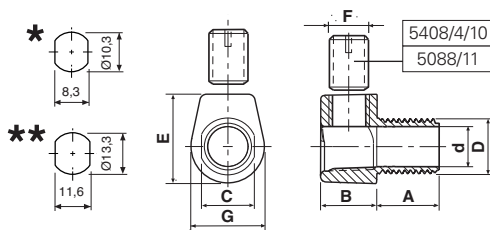

Materiale / Material

- 5** Nylon 66
- 6** Nylon 66 RV
- 11** Policarbonato
- 21** Nylon 66 RV-AE
- 24** Liquid Cristal Polymers
- 25** Polifenilensolfuro RV40

 Approvati per l'utilizzo in **Classe II**
 Approved for **Classe II** fittings

Codice / Code	Dimensioni / Dimensions (mm)								Colore / Colour					Omologato / Certified				
	A	B	C	D	d	E	F	G	Natural	0 Neutro White	1 Bianco Black	2 Nero Gold	4 Oro					
5100/7/109	9	10	8,0	M 10x1	7,2	16	M 7x1	14	Natural	5	11	24	25	6	6	25	6	<input type="checkbox"/> C.S. N°EH 229
5100/7/114	14	10	8,0	M 10x1	7,2	16	M 7x1	14	Materiale Material →	11	6	6	6	6	6	6	6	<input type="checkbox"/> C.S. N°EH 229
5346/07	7	12	11,5	M 13x1	9,5	19	M 8x1,25	15		11	6	6	6	6	6	6	6	<input type="checkbox"/> C.S. N°EH 229
5346/11	11	12	11,5	M 13x1	9,5	19	M 8x1,25	15		11	6	6	6	6	6	6	6	<input type="checkbox"/> C.S. N°EH 229
5346/20	20	12	11,5	M 13x1	9,5	19	M 8x1,25	15		11	6	6	6	6	6	6	6	<input type="checkbox"/> C.S. N°EH 229

* Dima di foratura 5100/7 - ** Dima di foratura 5346 - I bloccacavi vengono forniti con grano filettato separato.

M 10x1: Coppia di serraggio max = 130 N cm - M 13x1: Coppia di serraggio max = 150 N cm

Articoli 5100/7/109-5100/7/114: per cavi H03VV-F/H05VV-F Ø min 4,8 - Ø max 6,5 e H03VVH2-F sez. min 3x4,8 - sez. max 3,6x6

Articoli 5346/07-5346/11-5346/20: per cavi H03VV-F/H05VV-F Ø min 4,8 - Ø max 9 e H03VVH2-F sez. min 3x4,8 - sez. max 5x7,2

* Template 5100/7 - ** Template 5346 - Cable clamps are supplied with separate threaded grub.

M 10x1: Max tightening torque = 130 N cm - M 13x1: Max tightening torque = 150 N cm

Articles 5100/7/109-5100/7/114: for cables H03VV-F/H05VV-F Ø min 4,8 - Ø max 6,5 and H03VVH2-F sect. min 3x4,8 - sect. max 3,6x6

Articles 5346/07-5346/11-5346/20: for cables H03VV-F/H05VV-F Ø min 4,8 - Ø max 9 and H03VVH2-F sect. min 3x4,8 - sect. max 5x7,2