


Zugentlaster mit Madenschraube

Art. 5100/7/08/26 = schwarz

Art. 5100/7/08/16 = weiss

Art. 5100/7/08/46 = gold

Art. 5100/7/08/11 = transparent

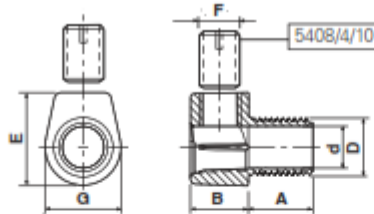

Materiale / Material

- 5 Nylon 66
- 6 Nylon 66 RV
- 11 Polycarbonato

Approvati per l'utilizzo in Classe II
Approved for Classe II fittings

Codice / Code	Dimensioni / Dimensions (mm)							Colore / Colour				Omologato Certified	
	A	B	D	d	E	F	G	0 Neutro Natural	1 Bianco White	2 Nero Black	4 Oro Gold		
5100/7/05	5	10	M 10x1	7,2	16	M 7x1	13,2	Materiale Material →	11	6	6	6	C.S. N°EH 229
5100/7/08	8	10	M 10x1	7,2	16	M 7x1	13,2		11	6	6	6	C.S. N°EH 229
5100/7/11	11	10	M 10x1	7,2	16	M 7x1	13,2		11	6	6	6	C.S. N°EH 229

I bloccacavi vengono forniti con grano filettato separato.

M 10x1: Coppia di serraggio max = 130 N cm

Per cavi: H03VV-F/H05VV-F Ø min 4,8 - Ø max 6,5 e H03VVH2-F sez. min 3x4,8 - sez. max 3,6x6,4

Cable clamps are supplied with separate threaded grub.

M 10x1: Max tightening torque = 130 N cm

For cables: H03VV-F/H05VV-F Ø min 4,8 - Ø max 6,5 and H03VVH2-F sect. min 3x4,8 - sect. max 3,6x6,4